


MLX160A0XY3-SRZ Non-Isolated DC-DC Power Module

7.0V_{DC} - 14V_{DC} input; 0.45V_{DC} to 2.0V_{DC} output; 160A Output Current

RoHS Compliant

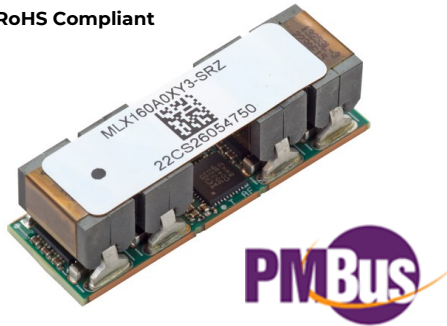

Applications

- High performance ASIC with dual power rails
- Networking processor power (Broadcom, Cavium, Marvell, NXP)
- High current FPGA power (Xilinx, Intel)
- High performance ARM processor power
- Telecommunications and networking equipment
- Servers and storage applications
- Test and Measurement equipment
- Industrial equipment

Features

- Compliant to RoHS II EU Directive 2011/65/EC and amended Directive (EU) 2015/863
- Compliant to IPC-9592 (Sept. 2008), Category 2, Class 2
- Compliant to REACH Directive (EC) No 1907/2006
- Compatible with a Pb-free or SnPn reflow soldering process
- Wide Input voltage range: 7.0V_{DC}-14V_{DC}
- Output voltage programable from 0.45V_{DC} to 2.0V via PMBus™
- Delivers up to 160 A_{DC} output current
- Supports Voltage Rails requiring 3% tolerance
- Operation of up to 4 Satellite phases in parallel(160A) as a common or separate bus.
- PID control and multi-phase operation provides fast transient response, reduced output capacitance, and stability.
- Tightly regulated output voltage
- Low output ripple and noise
- Fixed switching frequency
- Small size: 12.9 mm x 39 mm x 11.05 mm
0.507 in x 1.535 in x 0.435 in
- Digital interface compliant to PMBus™ Rev.1.3 protocol
- Programmable enable logic with On/Off Control.
- Protections: OVP, UVP, OCP, OTP
- Cycle-by-cycle output current monitoring and protection
- Over temperature protection
- Wide operating temperature range -40°C to 85°C
- Excellent Thermal Performance – Module delivers full output @12V_{IN}, 1V_{OUT}, 70°C ambient and 200 LFM (1m/s) airflow
- Power Stages are Interleaved to reduce input and output ripple.
- UL* 62368-1, 3rd Ed. Recognized, and VDE (EN62368-1 3rd Ed.) Licensed
- ISO** 9001 and ISO14001 certified manufacturing facilities

The OmniOn Power™ MLX160A0XY3 Digital DLynxIII™ power module is a non-isolated dc-dc converter that can deliver up to 160A of output current. It operates over a wide input voltage range from 7.0V_{DC} to 14V_{DC} and provides precisely regulated output voltage programmable from 0.45V_{DC} to 2.0V_{DC} via PMBus™. The module employs an advanced PID based adjustable digital control loop which ensures loop stability, provides fast transient response and reduces amount of required output capacitance. Up to 160A of additional satellite based phase modules can be connected in parallel to form a high current common rail or a second stand-alone bus. Main features include: digital PMBus™ interface, programmable enable logic and control, cycle-by-cycle output current monitoring, input and output under-voltage and over-voltage protections, under-temperature and over-temperature protections and more. The module has an extensive set of PMBus™ commands for both control and monitoring of the system parameters. The MLX160A0XY3 power module is highly configurable, and yet easy to use.

MLX160A0XY3-SRZ Technical Specifications

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Operational functionality of the device is not implied at these or any other conditions in the excess of those given in the operations sections of the data sheet. Exposure to the absolute maximum ratings for extended periods may adversely affect the device reliability.

Parameter	Symbol	Min	Max	Unit
Input Voltage (continuous)	V_{IN}	-0.3	14.5	V
Operating Ambient Temperature	T_A	-40*	85	°C
Storage Temperature		-55	125	°C

* At -40°C and 7V_{IN}, module may experience a few hiccup cycles before starting into full load

CAUTION: This power module is not internally fused. An input line fuse must always be used.

This power module can be used in a wide variety of applications, ranging from simple standalone operation to an integrated part of sophisticated power architecture. To preserve maximum flexibility, internal fusing is not included, however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require fast-acting fuses with a maximum rating of 60 A and two x 40A in the ungrounded input. Two x 40A fuses are recommended for input voltage <8A (see Safety Considerations section). Based on the information provided in this Data Sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's Data Sheet for further information.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
VOUTx_SENx, IMON_SATx, TSEN, PWM_SATx, PGOODx, VR_ENx, PROG, VRHOT, WARN#/GP		0	4	V
SM_DAT, SM_CLK, SM_ALERT#		0	5.5	V

Electrical Specifications

Unless otherwise indicated, specifications apply for all operating input voltages, resistive load and temperature conditions.

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Operating Input Voltage	All	V_{IN}	7.0		14	V _{DC}
Maximum Input Current ($V_{IN}=7.0V$ to $14V$, $I_O=I_{O,max}$)	All	$I_{IN,max}$		49.2		A _{DC}
Input No Load Current ($V_{IN} = 12V_{DC}$, $I_O = 0$, module enabled)	$V_{O,set} = 0.45V_{DC}$	$I_{IN,No\ load}$		182		mA
	$V_{O,set} = 2.0V_{DC}$	$I_{IN,No\ load}$		282		mA
Input Stand-by Current ($V_{IN} = 12V_{DC}$, module disabled)	All	$I_{IN,stand-by}$		52		mA
Inrush Transient	All	I^2t		1.26		A ² s
Input Reflected Ripple Current, peak-to-peak (5Hz to 20MHz, 1μH source impedance; $V_{IN} = 7.0$ to $14V$, $I_O = I_{O,max}$; See Test Configurations)	All			42		mA _{p-p}
Input Ripple Rejection (120Hz)	All			-53.4		dB

OmniOn Power™ is a trademark of OmniOn Power Inc. All other trademarks belong to their respective owners.

* UL is a registered trademark of Underwriters Laboratories, Inc.

† CSA is a registered trademark of Canadian Standards Association.

‡ VDE is a trademark of Verband Deutscher Elektrotechniker e.V.

** ISO is a registered trademark of the International Organization of Standards.

The PMBus name and logo are registered trademarks of the System Management Interface Forum (SMIF).

MLX160A0XY3-SRZ Technical Specifications (continued)

Electrical Specifications (continued)

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Output Voltage Set-point accuracy over entire output range						
0 to 85°C, $V_o = 0.45$	All	$V_{o, set}$		-0.6/+1.8		% $V_{o, set}$
0 to 85°C, $V_o = 0.6$	All	$V_{o, set}$		-0.6/+1.3		% $V_{o, set}$
0 to 85°C, $V_o = 0.7$	All	$V_{o, set}$		-0.5/+1.1		% $V_{o, set}$
0 to 85°C, $V_o = 0.8$	All	$V_{o, set}$		-0.5/+0.9		% $V_{o, set}$
0 to 85°C, $V_o = 0.9$	All	$V_{o, set}$		-0.4/+0.8		% $V_{o, set}$
0 to 85°C, $V_o = 1.0$	All	$V_{o, set}$		-0.4/+0.7		% $V_{o, set}$
0 to 85°C, $V_o = 1.2$	All	$V_{o, set}$		-0.3/+0.5		% $V_{o, set}$
0 to 85°C, $V_o = 1.8$	All	$V_{o, set}$		-0.3/+0.2		% $V_{o, set}$
0 to 85°C, $V_o = 2.0$	All	$V_{o, set}$		-0.4/+0.2		% $V_{o, set}$
Output Voltage Set-point accuracy over entire output range						
-40 to 85°C, $V_o = 0.45$	All	$V_{o, set}$		-1.9/+1.8		% $V_{o, set}$
-40 to 85°C, $V_o = 0.6$	All	$V_{o, set}$		-1.5/+1.3		% $V_{o, set}$
-40 to 85°C, $V_o = 0.7$	All	$V_{o, set}$		-1.3/+1.1		% $V_{o, set}$
-40 to 85°C, $V_o = 0.8$	All	$V_{o, set}$		-1.2/+0.9		% $V_{o, set}$
-40 to 85°C, $V_o = 0.9$	All	$V_{o, set}$		-1.0/+0.8		% $V_{o, set}$
-40 to 85°C, $V_o = 1.0$	All	$V_{o, set}$		-1.0/+0.7		% $V_{o, set}$
-40 to 85°C, $V_o = 1.2$	All	$V_{o, set}$		-0.8/+0.5		% $V_{o, set}$
-40 to 85°C, $V_o = 1.8$	All	$V_{o, set}$		-0.7/+0.2		% $V_{o, set}$
-40 to 85°C, $V_o = 2.0$	All	$V_{o, set}$		-0.7/+0.2		% $V_{o, set}$

Note:

The 5.5V and 3.3V Voltage rails on the module are only to be used to power Satellite units (SLX series) and pull-up resistors needed for the POL module. Use with Pull-up resistors as recommended in the datasheet. Do not use these voltage rails for any other purpose.

MLX160A0XY3-SRZ Technical Specifications (continued)

Electrical Specifications (continued)

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Voltage Regulation						
Line Regulation ($V_{IN}=V_{IN,min}$ to $V_{IN,max}$), $V_{OUT} < 1V$	All			0.2		% $V_{O,set}$
Line Regulation ($V_{IN}=V_{IN,min}$ to $V_{IN,max}$), $V_{OUT} \geq 1V$	All			0.09		% $V_{O,set}$
Load Regulation ($I_O=I_{O,min}$ to $I_{O,max}$), $V_{OUT} < 1V$	All			0.4		% $V_{O,set}$
Load Regulation ($I_O=I_{O,min}$ to $I_{O,max}$), $V_{OUT} \geq 1V$	All			0.2		% $V_{O,set}$
PMBus Adjustable Output Voltage Range	All	V_O	0.45		2.00	V_{DC}
PMBus Output Voltage Adjustment Step Size	All			3.904		mV
Remote Sense Range	All				0.5	V_{DC}
Input Ripple ($V_{IN}=V_{IN,nom}$ and $I_O=I_{O,min}$ to $I_{O,max}$ and $T_A=25^\circ C$ $C_{in} = 8 \times 1 \mu F \parallel 16 \times 10 \mu F \parallel 16 \times 22 \mu F \parallel 3 \times 560 \mu F$ Peak-to-Peak (5Hz to 20MHz bandwidth)	All			137@0.45 V_O 118 @2 V_O		mV _{pk-pk} mV _{pk-pk}
Output Ripple @580kHz ($V_{IN}=V_{IN,nom}$ and $I_O=I_{O,min}$ to $I_{O,max}$ and $T_A=25^\circ C$ $C_O = 4 \times 0.1 \mu F \parallel 4 \times 0.047 \mu F \parallel 15 \times 22 \mu F \parallel 73 \times 47 \mu F \parallel 6 \times 470 \mu F$ Peak-to-Peak (5Hz to 20MHz bandwidth)	All			1.7@0.45 V_O 2.3@2 V_O		mV _{pk-pk} mV _{pk-pk}
RMS (5Hz to 20MHz bandwidth)	All			0.8		mV _{rms}
Output Current (in source mode)	All	I_O		160		A _{DC}
Output Current Limit Inception (Hiccup Mode)	All	$I_{O,lim}$		197		A _{DC,max}
Efficiency $V_{IN}=12V_{DC}$, $T_A=25^\circ C$ $I_O=I_{O,max}$, $V_O=V_{O,set}$	$V_{O,set} = 0.45V_{DC}$ $V_{O,set} = 0.6V_{DC}$ $V_{O,set} = 0.8V_{DC}$ $V_{O,set} = 1.0V_{DC}$ $V_{O,set} = 1.8V_{DC}$ $V_{O,set} = 2.0V_{DC}$	η		80.6 84.1 87.3 89.7 93.2 93.6		% % % % % %
Switching Frequency (Fixed)	All	f_{sw}		580		kHz

Feature Specifications

Unless otherwise indicated, specifications apply for all operating input voltages, resistive load and temperature conditions. See Feature Descriptions for additional information.

Parameter	Device	Symbol	Min	Typ	Max	Units
On/Off Signal Interface (Negative Logic)#						
Logic High (Module OFF)						
Input High Current	All	I_{IH}	1.97		5	μA
Input High Voltage	All	V_{IH}			3.3	V
Logic Low (Module ON)						
Input Low Current	All	I_{IL}	0		5	μA
Input Low Voltage	All	V_{IL}			1.42	V
Turn-On Delay and Rise Times ($V_{IN}=V_{IN,nom}$, $I_O=I_{O,max}$, V_O to within $\pm 1\%$ of steady state)						
Case 1: Input power is applied for at least one second and then the On/Off input is enabled (delay from instant at which $V_{on/off}$ is enabled until $V_O = 10\%$ of $V_{O,set}$)	All	Tdelay		2.4		msec
Case 2: On/Off input is enabled and then input power is applied (delay from instant when $V_{IN} = V_{IN,min}$ until $V_O = 10\%$ of $V_{O,set}$)	All	Tdelay		1.1		msec
Output voltage Rise time (time for V_O to rise from 10% of $V_{O,set}$ to 90% of $V_{O,set}$)	All	Trise		11.9		msec
Output voltage overshoot ($T_A = 25^\circ C$ $V_{IN}=V_{IN,min}$ to $V_{IN,max}$, $I_O=I_{O,min}$ to $I_{O,max}$) With or without maximum external capacitance					4.3	% $V_{O,set}$

MLX160A0XY3-SRZ Technical Specifications (continued)

Feature Specifications (continued)

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Over Temperature Protection (See Thermal Considerations section)	All	T_{OT}		125		°C
PMBus Over Temperature Warning Threshold *	All	T_{WARN}		110		°C
Input Undervoltage Lockout	All			6.25		V_{DC}
Turn-on Threshold	All			5.75		V_{DC}
Turn-off Threshold	All			0.5		V_{DC}
Hysteresis	All					V_{DC}
PMBus Input Under Voltage Lockout Thresholds (Do not change)	All			5.75	14	V_{DC}
Resolution of Input Under Voltage Threshold	All			250		mV
PGOODx – PGOOD Equivalent Signal Interface Open Drain, $V_{supply} \leq 3.6V_{DC}$, Recommended pull-up circuit: 10K resistor with 3.3Vsupply						
Output Low voltage (4mA Drive)	All				0.3	V
Output Leakage ($V_{pad} = 0$ to 3.6V)	All				±5	μA

* Over temperature Warning – Warning may not activate before alarm and unit may shutdown before warning.

General Specifications

Parameter	Device	Min	Typ	Max	Unit
Calculated MTBF ($I_O=0.8I_O$, max, $T_A=40^\circ\text{C}$) Telecordia Issue 4 Method 1 Case 3	All		16,811,807		Hours
Weight			12.6 (0.444)		g (oz.)

Digital Interface Specifications

Unless otherwise indicated, specifications apply for all operating input voltages, resistive load and temperature conditions. See Feature Descriptions for additional information.

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
PMBus Signal Interface Characteristics						
Input High Voltage (SM_DAT, SM_ALERT#)		V_{IH}	2.1		5	V
Input Low Voltage (SM_DAT, SM_ALERT#)		V_{IL}			0.8	V
Input Leakage (SM_DAT, SM_CLK, VR_ENx)	$V_{pad} = 0 - 3.6V$	I_{IH}	-1		1	μA
Output Low Voltage (Open-Drain Outputs – 4mA drive, SM_DAT, SM_ALERT#)	$I_{OUT}=4mA$	V_{OL}			0.3	V
Output Leakage (Open-drain outputs – 4mA drive, PGOODx, SM_DAT, SM_ALERT#)	$V_{OUT} = 0 - 3.6V$	I_{OH}	-5		5	μA
Pin capacitance		C_O		0.7		pF
PMBus Operating frequency range			10		1000	kHz
Measurement System Characteristics						
Output current measurement range		$I_{OUT(rng)}$	0	511.5		A
Output current measurement accuracy -40 to 85°C		I_{ACC}	-12		3.5	%
Output Current Resolution (Settable in PMBus)			0.25		0.5	A
Temperature measurement accuracy @12V _{IN} , 25°C to 85°C		T_{ACC}		7		°C
Temperature measurement resolution		$T_{MEAS(res)}$		1		°C
V _{IN} measurement range		$V_{IN(rng)}$	0		16.8	V
V _{IN} measurement accuracy		$V_{IN, ACC}$		±2.5		%
V _{IN} measurement resolution		$V_{IN, RES}$		31.25		mV
V _{OUT} measurement range		$V_{OUT(rng)}$	0		2.55	V
V _{OUT} measurement resolution		$V_{OUT(res)}$		4		mV
V _{OUT} measurement accuracy		$V_{OUT, ACC}$		±2		%

MLX160A0XY3-SRZ Technical Specifications (continued)

Characteristic Curves

The following figures provide typical characteristics for the 160A Master DLynxIII™ module at 0.45V_o and 25°C.

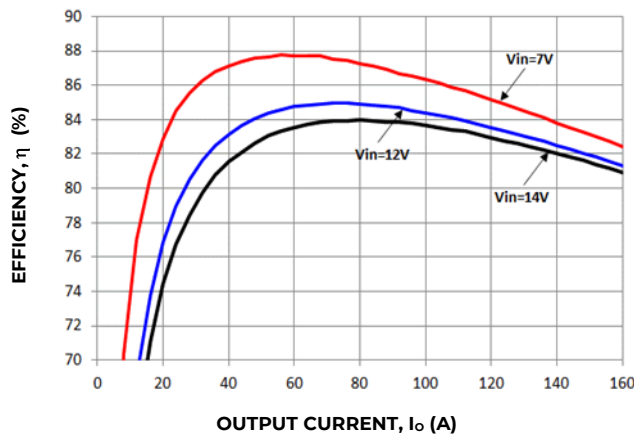


Figure 1. Converter Efficiency versus Output Current.

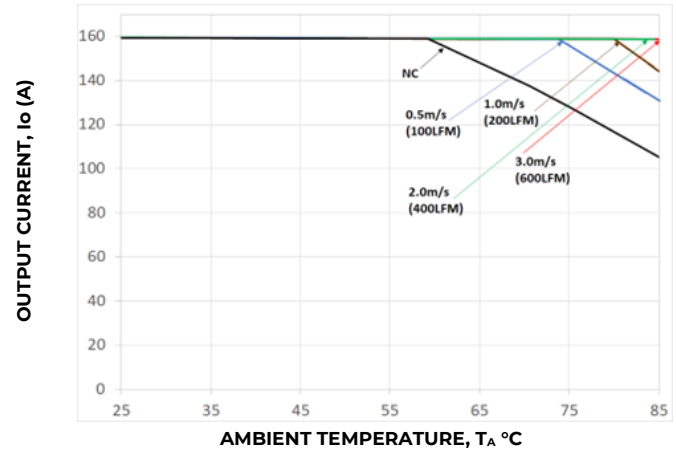


Figure 2. Derating Output Current versus Ambient Temperature and Airflow.

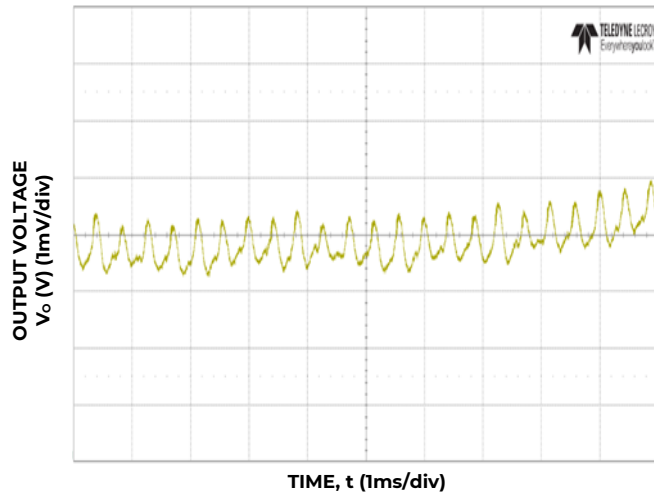


Figure 3. Typical output ripple ($C_o=4 \times 0.047\mu\text{F} + 4 \times 0.1\mu\text{F} + 15 \times 22\mu\text{F} + 73 \times 47\mu\text{F} + 6 \times 470\mu\text{F}$ polymer, $V_{IN} = 12\text{V}$, $I_o = I_{o,max}$).

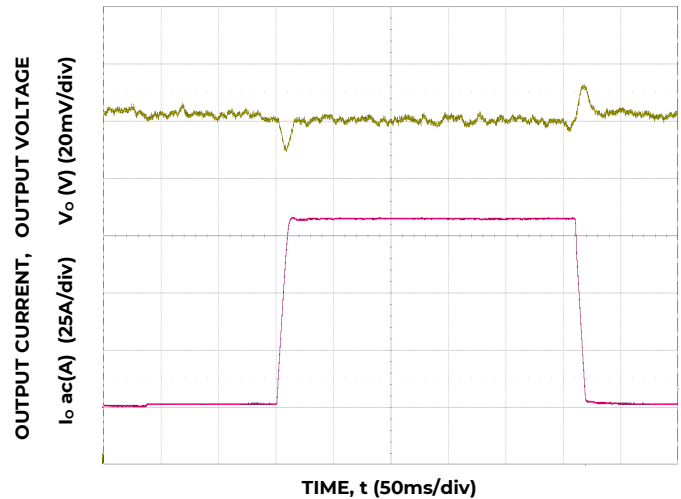


Figure 4. Trans. Resp. to 10A/μs Load Change from 25% to 75% at 12V_{IN}, $C_o=4 \times 0.047\mu\text{F} + 4 \times 0.1\mu\text{F} + 15 \times 22\mu\text{F} + 73 \times 47\mu\text{F} + 6 \times 470\mu\text{F}$ polymer.

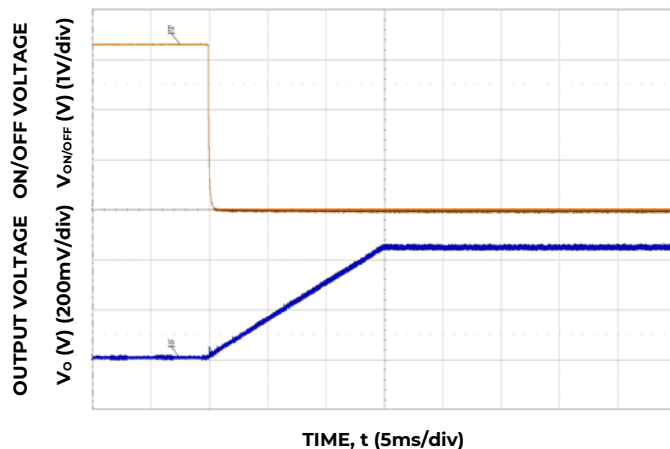


Figure 5. Typical Start-up Using On/Off Voltage ($I_o = I_{o,max}$).

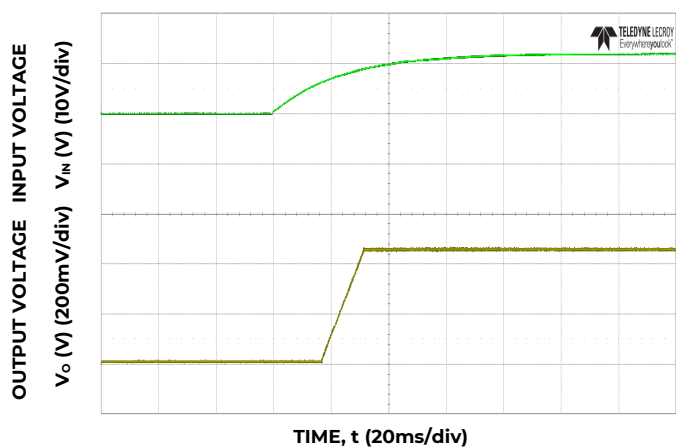


Figure 6. Typical Start-up Using Input Voltage ($V_{IN} = 12\text{V}$, $I_o = I_{o,max}$).

MLX160A0XY3-SRZ Technical Specifications (continued)

Characteristic Curves (Continued)

The following figures provide typical characteristics for the 160A Master DLynxIII™ module at 1.0V_o and 25°C.

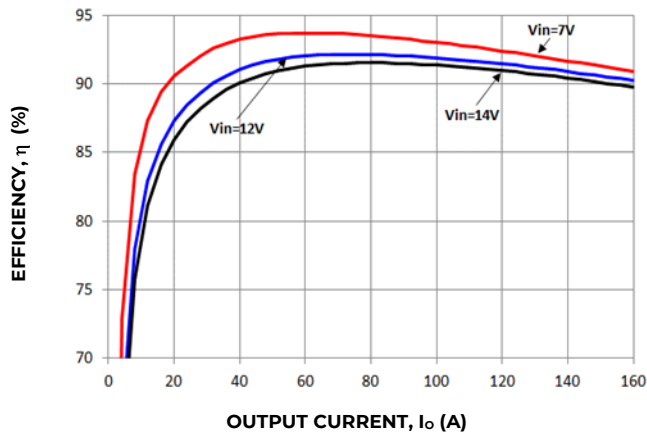


Figure 7. Converter Efficiency versus Output Current.

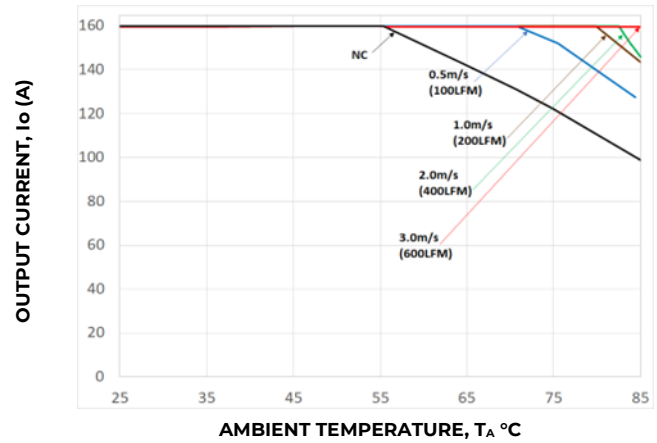


Figure 8. Derating Output Current versus Ambient Temperature and Airflow.

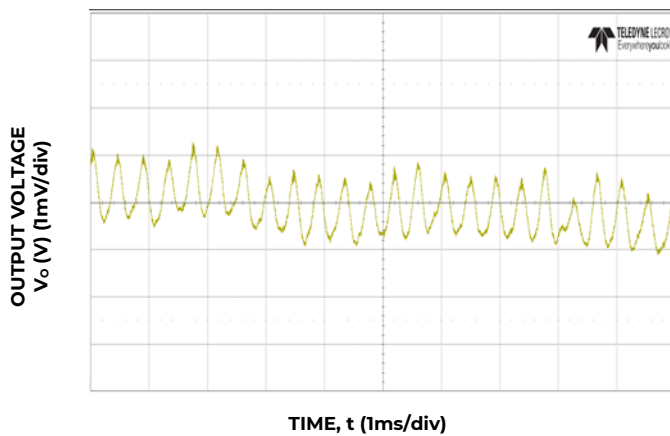


Figure 9. Typical output ripple($C_o=4\times0.047\mu\text{F}+4\times0.1\mu\text{F}+15\times22\mu\text{F}+73\times47\mu\text{F}+6\times470\mu\text{F}$ polymer, $V_{IN}=12\text{V}$, $I_o=I_{o,max}$).

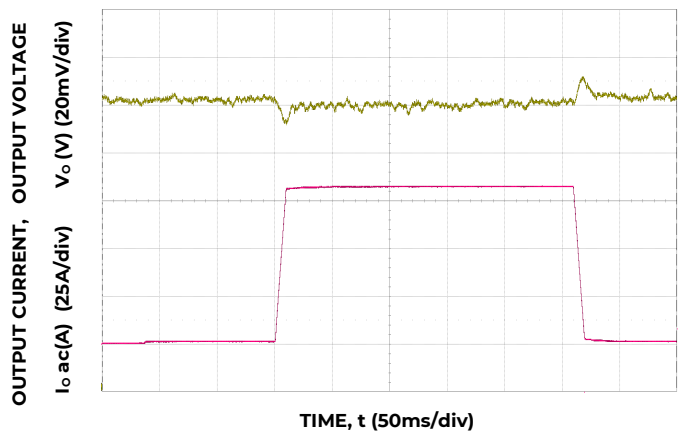


Figure 10. Trans. Resp. to 100A/μs Load Change from 25% to 75% at 12V_{IN}, $C_o=4\times0.047\mu\text{F}+4\times0.1\mu\text{F}+15\times22\mu\text{F}+73\times47\mu\text{F}+6\times470\mu\text{F}$ polymer.

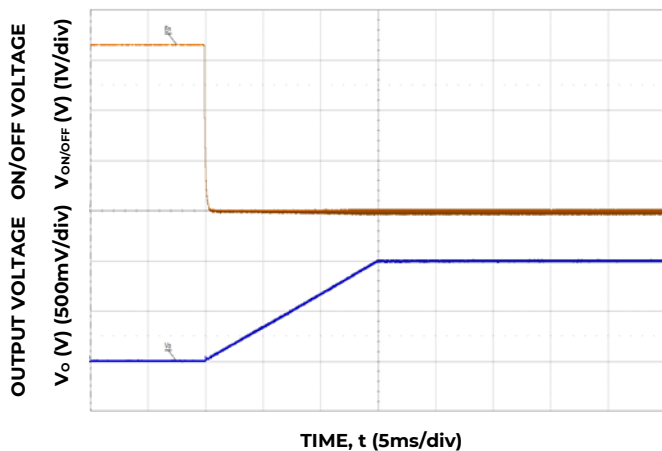


Figure 11. Typical Start-up Using On/Off Voltage ($I_o=I_{o,max}$).

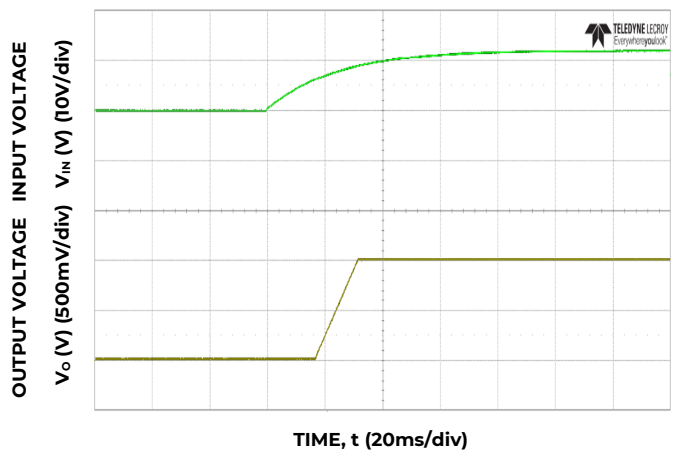


Figure 12. Typical Start-up Using Input Voltage ($V_{IN}=12\text{V}$, $I_o=I_{o,max}$).

MLX160A0XY3-SRZ Technical Specifications (continued)

Characteristic Curves (Continued)

The following figures provide typical characteristics for the 160A Master DLynxIII™ module at 1.5V_o and 25°C.

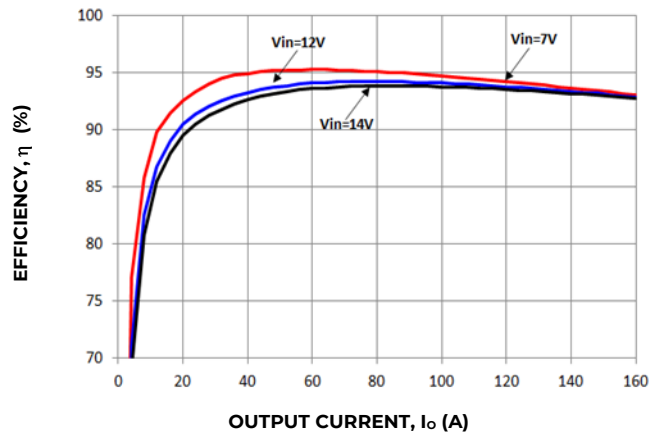


Figure 13. Converter Efficiency versus Output Current.

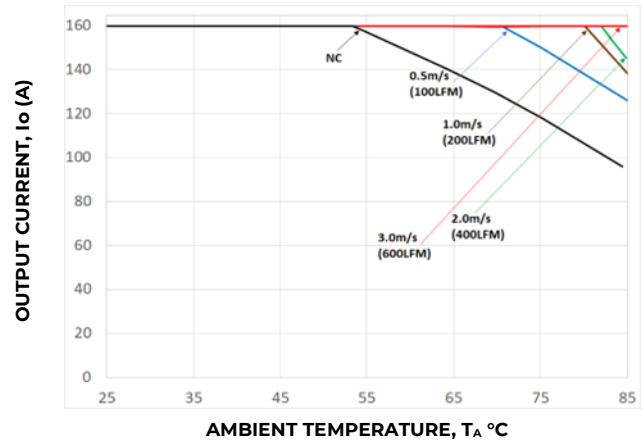


Figure 14. Derating Output Current versus Ambient Temperature and Airflow.

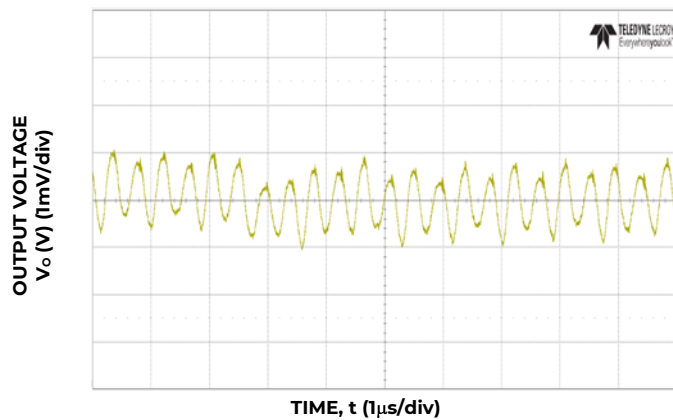


Figure 15. Typical output ripple ($C_o=4 \times 0.047\mu\text{F} + 4 \times 0.1\mu\text{F} + 15 \times 22\mu\text{F} + 73 \times 47\mu\text{F} + 6 \times 470\mu\text{F}$ polymer, $V_{in} = 12\text{V}$, $I_o = I_{o,max}$).

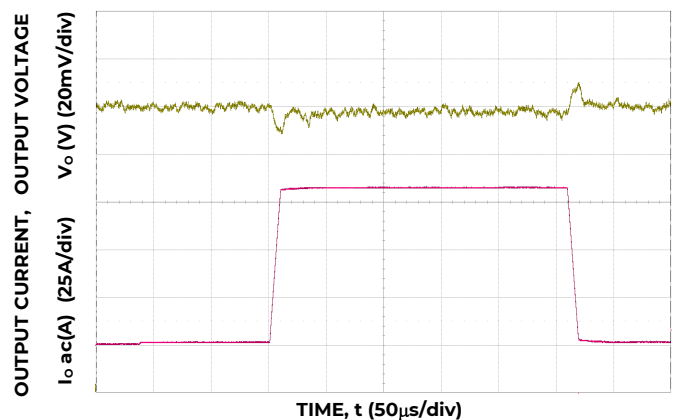


Figure 16. Trans. Resp. to 100A/μs Load Change from 25% to 75% at 12V_{in}, $C_o=4 \times 0.047\mu\text{F} + 4 \times 0.1\mu\text{F} + 15 \times 22\mu\text{F} + 73 \times 47\mu\text{F} + 6 \times 470\mu\text{F}$ polymer.

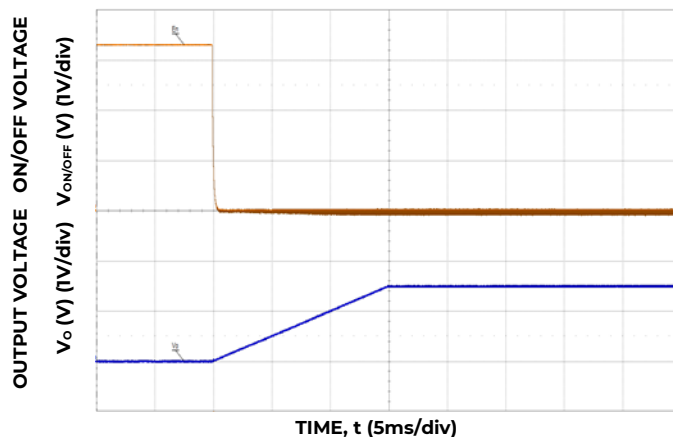


Figure 17. Typical Start-up Using On/Off Voltage ($I_o = I_{o,max}$).

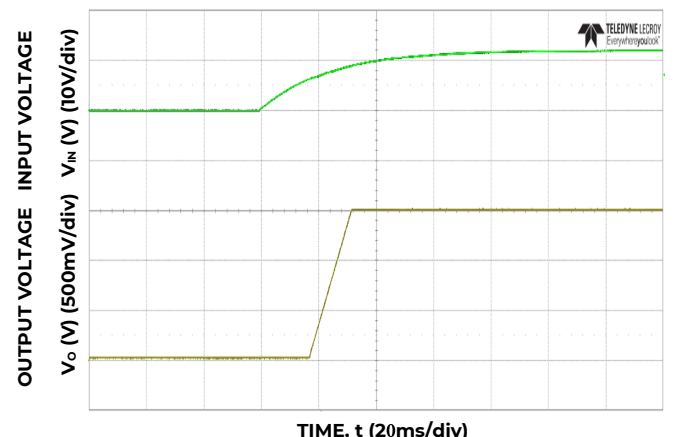


Figure 18. Typical Start-up Using Input Voltage ($V_{in} = 12\text{V}$, $I_o = I_{o,max}$).

MLX160A0XY3-SRZ Technical Specifications (continued)

Characteristic Curves (Continued)

The following figures provide typical characteristics for the 160A Master DLynxIII™ module at 2V_o and 25°C.

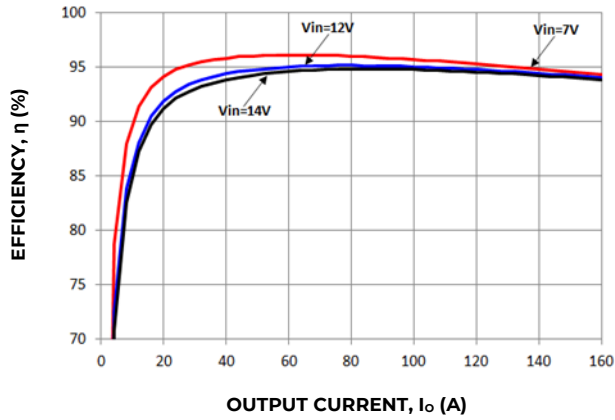


Figure 19. Converter Efficiency versus Output Current.

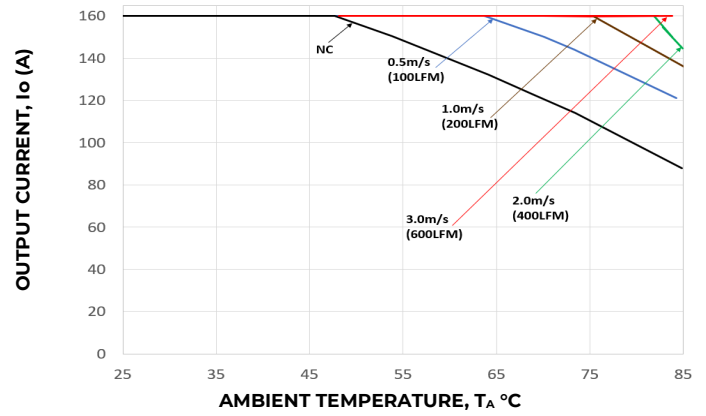


Figure 20. Derating Output Current versus Ambient Temperature and Airflow.

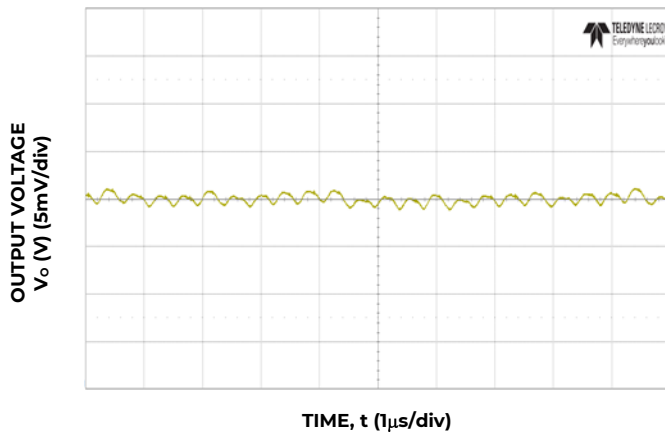


Figure 21. Typical output ripple (C_o=4x0.047μF +4x0.1μF + 15x22μF + 73x47μF + 6x470μF polymer, V_{IN} = 12V, I_o = I_{o,max}).

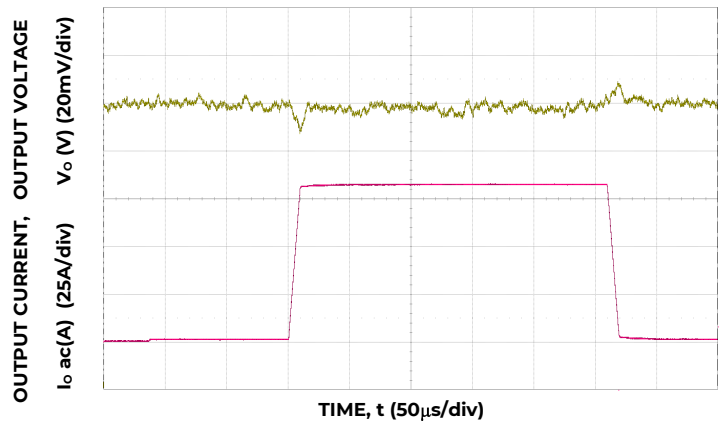


Figure 22. Trans. Resp. to 100A/μs Load Change from 25% to 75% at 12V_{IN}, C_o=4x0.047μF +4x0.1μF + 15x22μF + 73x47μF + 6x470μF polymer.

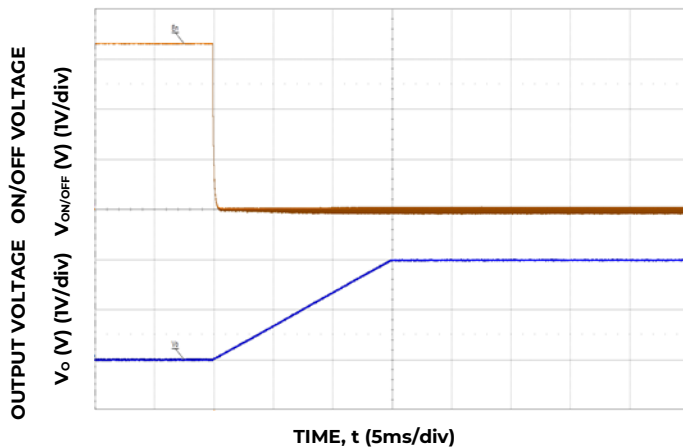


Figure 23. Typical Start-up Using On/Off Voltage (I_o = I_{o,max}).

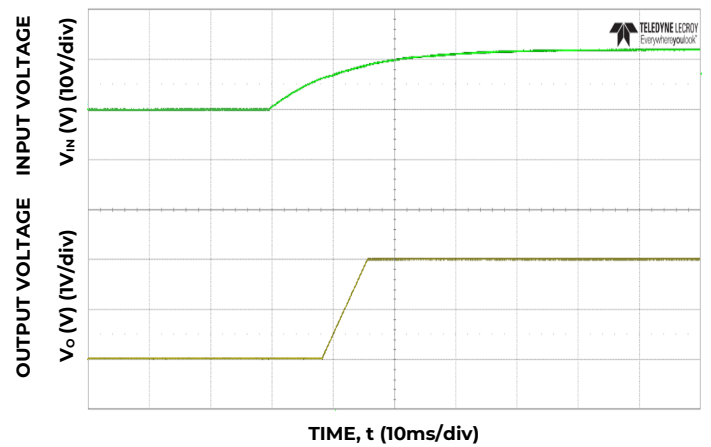


Figure 24. Typical Start-up Using Input Voltage (V_{IN} = 12V, I_o = I_{o,max}).

MLX160A0XY3-SRZ Technical Specifications (continued)

Design Considerations

Input Filtering

To minimize input voltage ripple, ceramic capacitors are recommended at the input of the module. Figure 25 shows the input ripple voltage for various output voltages at 100% of load current with different input capacitor combinations to achieve 1.5 % and lower input ripple. Since voltage used was 12V_{IN}, all the curves stayed below the 180mV(1.5%) threshold.

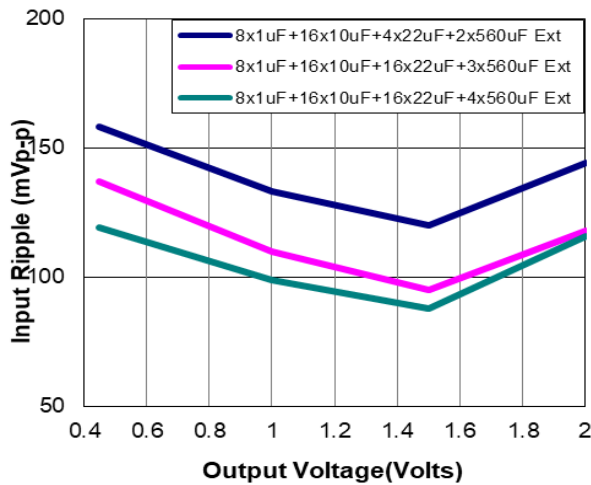


Figure 25. Input ripple voltage for various output voltages with three input capacitor combinations at full load. Input voltage is 12V.

These caps were placed at the bottom of the board and directly under each of the phases as shown in the layout of the evaluation board (Fig. 31). Each phase had a minimum of 2x1μF and 3x10μF closest to the pins.

Output Filtering

These modules are designed for low output ripple voltage and will meet stringent output ripple

Figure 26 provides output ripple information various output voltages and full load current for different levels of capacitance. Ceramic capacitance will reduce output ripple and improve the transient performance of the module.

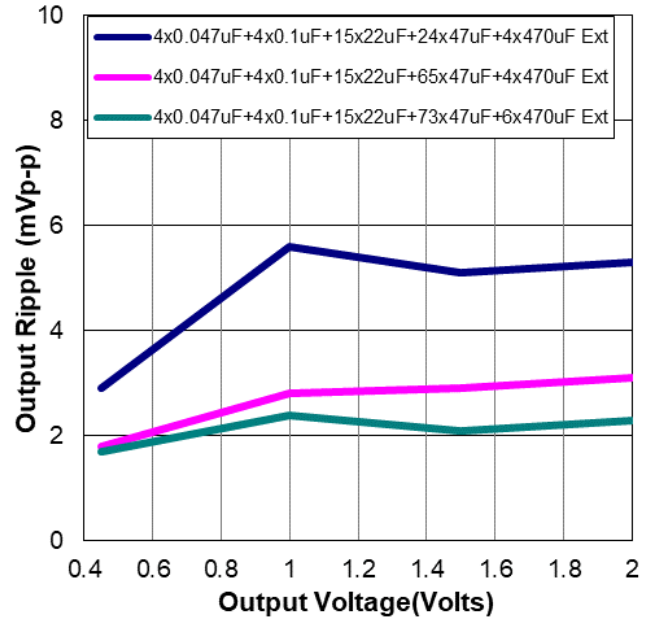


Figure 26. Peak to peak output ripple voltage for various output voltages with external capacitors at the output (160A load). Input voltage is 12V.

Transient Testing

Module performance for different transient conditions at rated output capacitance.

Voltage Rail (volts)	Step Load (%) of full load	Load Slew Rate (A/μsec)	ΔV Variation (%)
0.45V	50	10	-2.37% to 2.82%
1V	50	10	-0.84% to 1.21%
1.5V	50	10	-0.77% to 0.67%
2V	50	10	-0.65% to 0.44%

Kp=42, Ki=22,Kd=58,Kpole1=5,Kpole2=7 for above tests.

Safety Considerations

For safety agency approval, the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standards, i.e., UL* 62368-1, 3rd Ed. Recognized, and VDE (EN62368-1, 3rd Ed.) Licensed.

For the converter output to be considered meeting the requirements of safety extra-low voltage (SELV) or ES1, the input must meet SELV/ES1 requirements. The power module has extra low voltage (ELV) outputs when all inputs are ELV.

MLX160A0XY3-SRZ Technical Specifications (continued)

Safety Considerations (Continued)

The MLX160A0X model was tested using an external Littelfuse 456 series 60A and two 40A, fast-acting fuses in the ungrounded input. Two 40A fuses are recommended for input voltages <8Vdc. The use of no fuse or a higher rated fuse should be evaluated in the end-use equipment. The maximum hot spot temperature on IC200/C202 shall not exceed 120/115°C.

Remote On/Off

The NexGen module can be turned ON and OFF either by using the ON/OFF pin (Analog interface) or through the PMBus interface (Digital). The module can be configured in a number of ways through the PMBus interface to react to the ON/OFF input:

- Module ON/OFF can be controlled only through the analog interface (digital interface ON/OFF commands are ignored).
- Module ON/OFF can be controlled only through the PMBus interface (analog interface is ignored).
- Module ON/OFF can be controlled by either the analog or digital interface.

The default state of the module (as shipped from the factory) is to be controlled by the PMBus interface and analog interface. Module control through the digital interface must be made through PMBus. These changes can be made and written to non-volatile memory on the module so that it is remembered for subsequent use.

The ON/OFF pin should not be left floating and must be pulled either high or low.

Digital On/Off

Please see the Digital Feature Descriptions section.

Monotonic Start-up and Shutdown

The module has monotonic start-up and shutdown behavior on the output for any combination of rated input voltage, output current, and operating temperature range.

Startup into Pre-biased Output

The module will start into a pre biased output on output as long as the pre bias voltage is 15% less than the set output voltage.

Remote Sense

The power module has a differential Remote Sense feature to minimize the effects of distribution losses by regulating the voltage between the sense pins (VS+ and VS-) for the output. The voltage drop between the sense pins and the V_{OUT} and GND pins of the module should not exceed 100mV.

Overcurrent Protection (OCP)

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry on the output and can endure current limiting continuously. The module's overcurrent response is to hiccup forever. OCP response can be changed with a PMBus command.

Overtemperature Protection

To provide protection in a fault condition, the unit has a thermal shutdown circuit. The unit will shut down if the overtemperature threshold of 125°C (typ) is exceeded at the thermal reference point Tref. Once the unit goes into thermal shutdown, it will wait to cool down to 97% of set limit before attempting to restart.

Power Good

Power good needs external pull up resistor. The pins are called PGOOD1 and PGOOD2 (loop1/loop2) and their thresholds are specified via PMBus.

An example of Power Good / PGOOD behavior is shown below. The top green waveform is the slowly rising input voltage and the bottom brown waveform is the output voltage. As soon as the output voltage crosses the PGOOD1 threshold, the pin is pulled high as seen in the scope capture.

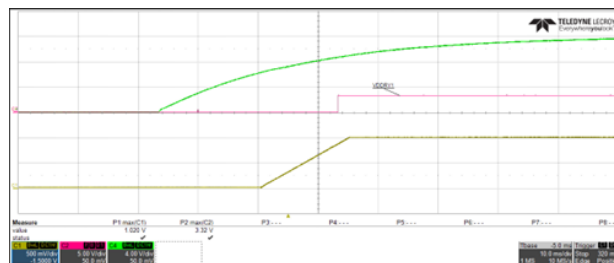


Figure 27. V_{IN}, PGOOD1 and Vout1 waveform.

MLX160A0XY3-SRZ Technical Specifications (continued)

Start-up procedure

ON/OFF

The MLX160A0XY3-SRZ is a programmable ON/OFF logic power module. The default state of the module is Negative Logic. The module is ON when the ON/OFF pin is at a “logic low” state, and OFF when it is at “logic high” state. Positive ON/OFF logic can be implemented through PMBus control.

The module could be turned ON and OFF from an external enable signal or by the OPERATION 0x01 command. Desired behavior is set by ON_OFF_CONFIG 0x02 command.

Input overvoltage and undervoltage protections

The input overvoltage and undervoltage protections prevent the MLX160A0XY3-SRZ from operating when the input is above or falls below preset thresholds.

The customers are strongly advised not to increase the preset input overvoltage limit or decrease input undervoltage limit as it may result in compromising product safety. This is a violation of the module's absolute maximum and minimum ratings which will void the product warranty.

The input overvoltage and undervoltage protections could be adjusted by the following commands:

VIN_OV_FAULT_RESPONSE 0x56,
VIN_OV_FAULT_LIMIT 0x55 and
VIN_UV_WARN_LIMIT 0x58. See commands description for more details.

Output overvoltage and undervoltage protections

The MLX160A0XY3-SRZ offers an internal output overvoltage protection circuit that can be used to protect sensitive load circuitry from being subjected to a voltage higher than its prescribed limits.

The MLX160A0XY3-SRZ overvoltage and undervoltage behavior can be configured through the following commands:

VOUT_OV_FAULT_RESPONSE 0x41,
VOUT_UV_FAULT_RESPONSE 0x45,
VOUT_OV_FAULT_LIMIT 0x40,
VOUT_OV_WARN_LIMIT 0x42,
VOUT_UV_WARN_LIMIT 0x43 and
VOUT_UV_FAULT_LIMIT 0x44.

See commands description for more details.

Output overcurrent protection

Output overcurrent protection prevents excessive forward current through the module and the load during abnormal operation. Overcurrent protection is cycle-by-cycle in nature. This is managed by IOUT_OC_FAULT_LIMIT 0x46.

Customers are strongly advised not to increase the preset output overcurrent limits or decrease output undercurrent limits as it may result in compromising product safety. This is a violation of the module's absolute maximum and minimum ratings which will void the product warranty.

The output overcurrent warning limits and fault response can be managed by:

IOUT_OC_WARN_LIMIT 0x4A,
IOUT_OC_FAULT_RESPONSE 0x47.

Overtemperature protection

The MLX160A0XY3-SRZ overtemperature protection ensures that the temperature inside the module is below all the component's temperature maximum limit.

The overtemperature protections are managed by the following commands: OT_FAULT_RESPONSE 0x50, OT_WARN_LIMIT 0x51.

Monitoring through SMBAlert or SALERT pin

The MLX160A0XY3-SRZ controller can report fault conditions by changing the state of the SMBALERT pin, which is asserted when any number of preconfigured fault conditions occur. The module can also be monitored continuously for any number of power conversion parameters. Some of most useful fault monitoring commands are: STATUS_BYTE 0x78, STATUS_WORD 0x79, STATUS_VOUT 0x7A, STATUS_IOUT 0x7B, STATUS_INPUT 0x7C, STATUS_TEMPERATURE 0x7D.

Control loop tuning

The heart of MLX160A0XY3-SRZ is a fully digital controller IC with state-of-the-art PID Control. By default, this control loop is stable for recommended output capacitance and loads. However, it may be further tuned to achieve higher performance under more specific application requirements. Since the control scheme is digital from end to end, there is no dependence upon external compensation networks. This simplifies the design process by removing such considerations as temperature and process variation of passive components. Control parameters are set through the 0xD0 PMBus command.

MLX160A0XY3-SRZ Technical Specifications (continued)

Non-volatile memory management

The MLX160A0XY3-SRZ has internal non-volatile memory where the module's configurations are stored.

During the initialization process, the MLX160A0XY3-SRZ checks for stored values contained in its internal non-volatile memory. The MLX160 offers up to 24 writes to configure basic module parameters such as output voltage setpoint, fault operation settings, etc. It also allows loading of pre-installed configuration file from up to 15 options to help set multiple MLX modules powering different rails on a common PMBus.

Layout considerations

The evaluation board layout and schematic files are available for interested users. These can be downloaded through the webpage or by contacting OmniOn Power™ through the web request or helpline.

MLX160A0XY3-SRZ Technical Specifications (continued)

Digital Compensator

The MLX160 module uses digital control to regulate the output voltage. As with all POL modules, external capacitors are usually added to the output of the module for two reasons: to reduce output ripple and noise and to reduce output voltage deviations from the steady-state value in the presence of dynamic load current changes.

The MLX160 comes with default compensation values programmed into the non-volatile memory of the module. These digital compensation values can be adjusted externally to optimize transient response and ensure stability for a wide range of external capacitance, and with different types of output capacitance.

Table 1

Components	Control Loop Parameters				
Output Capacitors	KPole1	KPole2	Kp	Ki	Kd
15x22 μ F + 24x47 μ F + 4x470 μ F	5	7	42	22	58
15x22 μ F + 65x47 μ F + 4x470 μ F	5	7	42	22	58
15x22 μ F + 73x47 μ F + 6x470 μ F	5	7	42	22	58

Power Module Wizard

Designers can access a free, web-based, easy to use tool that helps users simulate and tune the MLX160A0XY3-SRZ feedback loop parameters. Go to <http://OmniOn Power.transim.com> and sign up for a free account to use the module selector tool. The tool also offers online Simplis/Simatrix models that can be used to assess transient performance, module stability, etc.

Digital Power Insight (DPI)

DPI is a software tool that helps users evaluate and simulate the PMBus performance of the MLX160A0XY3A modules without the need to write software. The software can be downloaded for free from our webpage. A USB to I²C adapter and associated cable set are required for proper functioning of the software suite. For first time users, we recommend using the DPI Evaluation Kit, which can be purchased from any of the leading distributors. Please ensure that the USB to I²C adapter being used/purchased is Version 2.2 or higher. Part Numbers are available in the last few pages of this datasheet.

MLX160A0XY3-SRZ Technical Specifications (continued)

PMBus use guidelines

An I²C or PMBus interface is used to communicate with the module. These two-wire serial interfaces consist of clock and data signals and operate as fast as 1 MHz with proper signal integrity. 400kHz is the typical operating frequency. The bus provides read and write access to the internal registers for configuration and monitoring of operating parameters. The bus is also used to program on-chip non-volatile memory (MTP) to store operating parameters. To ensure operation with multiple devices on the bus, an exclusive address for the module is programmed into MTP. To protect customer configuration and information, the I²C interface can be configured for either limited access or locked with a 16-bit software password. Limited access includes both write and read protection options. In addition, there is a telemetry-only mode which only allows reads from the telemetry registers. The module supports the Packet Error Checking (PEC) protocol and a number of PMBus commands to monitor voltages and currents.

PMBus data format

Linear-11

The L11 data format uses 5-bit two's complement exponent (N) and 11-bit two's complement mantissa (Y) to represent a real world decimal value (X). The formula to calculate the real world decimal value is: $X = Y \cdot 2^N$.

Linear-16

The L16u data format uses a fixed exponent (hard-coded to N = -xxh) and a 16-bit unsigned integer mantissa (Y) to represent real world decimal value (X). The formula to calculate the real world decimal value is: $X = Y \cdot 2^{-xx}$.

Linear-16 Signed

The L16s data format uses a fixed exponent (hard-coded to N = -xxh) and a 16-bit two's complement mantissa (Y) to represent real world decimal value (X). The formula to calculate the real world decimal value is: $X = Y \cdot 2^{-xx}$.

Bit Field

A description of the Bit Field format is provided in each command details.

Custom

A description of the Custom data format is provided in each command details. A combination of Bit Field and integer are common type of Custom data format.

ASCII (ASC)

A variable length string of text characters in the ASCII data format.

PMBus Addressing

The power module is addressed through the PMBus using a device address. The default module address is **0x40**. The module supports 15 possible offset addresses (**0x40** to **0x55**). If multiple modules are used on the same bus, user must power up each module individually, change the module address, and then move on to the next module to repeat the process. If this is not possible, a pre-defined resistor can be connected to the PROG pin to provide an offset to the default address yielding a different address for each module on the same bus as described later in this document.

MLX160A0XY3-SRZ Technical Specifications (continued)

PMBus Addressing

The module simultaneously supports I²C and PMBus through the use of exclusive addressing. By using a 7-bit address, the user can configure the device to any one of 127 different I²C/PMBus addresses. Once the address of is set, it can be locked to protect it from being overridden. Optionally, a resistor can be tied to the PROG pin to generate an offset as shown in Table below (note that a 0.01 μ F capacitor is required across the resistor). The base I²C address is **0x10** and Base PMBus address is **0x40**. For default programmed devices, the I²C/PMBus address can be temporarily forced to **0x0A** for I²C and **0x0D** for PMBus by driving the PROG pin high (3.3 V).

The module supports 15 possible offset addresses (**0x40** to **0x55**) through resistor connection to the PROG pin. If multiple modules are used on the same bus without different PROG pin resistors, user must power up each module individually, change the module address and then move on to the next module and repeat the process. (See Quick Start Process in this datasheet). **0xD0** sub-commands are used to set and lock PMBus address and offset.

Example for 3 MLX modules on the same PMBus channel. Select a 0.845K ohm resistor on program pin of module 1, 1.3kohm resistor on module 2 and a 1.78kohm resistor on module 3.

This results in:

Module 1 : I²C address is 10h+0h=10h, PMBus address is 40h+0h=40h

Module 2 : I²C address is 10h+1h=11h, PMBus address is 40h+1h=41h

Module 3 : I²C address is 10h+2h=12h, PMBus address is 40h+2h=42h

PROG RESISTOR	I ² C Address Offset
0.845kΩ	+0
1.3kΩ	+1
1.78kΩ	+2
2.32kΩ	+3
2.87kΩ	+4
3.48kΩ	+5
4.12kΩ	+6
4.75kΩ	+7
5.49kΩ	+8
6.19kΩ	+9
6.98kΩ	+10
7.87kΩ	+11
8.87kΩ	+12
10.00kΩ	+13
11.00kΩ	+14
12.10kΩ	+15

MLX160A0XY3-SRZ Technical Specifications (continued)

Summary of Supported PMBus Commands

This section provides a summary of the MLX160A0XY3 commands followed by their detailed description. The commands are outlined in the order of increasing command codes. Since there are 2 Loops, the commands are presented for each Loop for completeness.

Table 2 - LOOP 1 / OUTPUT 1 Commands

PMBUS CMD	CMD CODE	DATA BYTES	DATA FORMAT	DATA UNITS	TRANSFER TYPE	DEFAULT VALUE	MIN/MAX VALUES or RANGE
PAGE	0x00	1	Bit field		R/W	00	01 / FF
OPERATION	0x01	1	Bit field		R/W	80	00/40/80/94/98 /A4/A8
ON_OFF_CONFIG	0x02	1	Bit field		R/W	1C	02/14/15/16/17/18 /1C/1D/1E/1F
CLEAR_FAULTS	0x03	0			W		
WRITE_PROTECT	0x10	1	Bit field		W	0x00	
RESTORE_DEFAULT_ALL	0x12	0			W		
STORE_USER_ALL	0x15	0			W	CAN USE ONLY 24 TIMES	
RESTORE_USER_ALL	0x16	0			W		
CAPABILITY	0x19	1	Bit field		R	0xB0	
SMBALERT_MASK	0x1B	2	Bit field		R/W	000100000100	
VOUT_MODE	0x20	1	mode + exp		R/W	0x18 (-8 Exponent)	-8, -9, -12
VOUT_COMMAND	0x21	2	16-bit linear	V	R/W	0073 (0.449V)	0.45 –2.0
VOUT_TRIM	0x22	2	16-bit linear	V	R/W*	0.000V	-2 to 2
VOUT_MAX	0x24	2	16-bit linear	V	R/W	021A (2.102V)	0.45 to 2.102
VOUT_MARGIN_HIGH	0x25	2	16-bit linear	V	R/W*	0000	0 to 2.102
VOUT_MARGIN_LOW	0x26	2	16-bit linear	V	R/W*	0000	0 to 2.102
VOUT_TRANSITION_RATE	0x27	2	11-bit linear	V/ms	R/W	0xE808 (1mV/μs)	0 to 127.875mV/μsec
VOUT_DROOP	0x28	2	11-bit linear	V	R/W	0000	0 to 9.98mΩ
VOUT_MIN	0x2B	2	11-bit linear	V	R/W	0040 (0.25V)	0 to 2.102
FREQUENCY_SWITCH	0x33	2	11-bit linear	kHz	R/W	0244 (580kHz)	
POWER_MODE	0x34	2	Bit field		R/W	0x0003 (Max Power)	0, 3, 4, 5
VIN_ON	0x35	2	11-bit linear	V	R/W	F019 (6.25)	6.25 - 14
VIN_OFF	0x36	2	11-bit linear	V	R/W	F017 (5.75)	5.75 - 14
IOUT_CAL_GAIN	0x38	2	11-bit linear	mΩ	R/W	Vary	
IOUT_CAL_OFFSET	0x39	2	11-bit linear	A	R/W	Vary	

* Cannot be stored in NVM. Module will accept Write command but will not transfer to NVM when STORE_USER_ALL is used

† Cannot be stored in NVM. Module will hold any written value till power cycle. Cannot use RESTORE_USER_ALL to revert to default value

MLX160A0XY3-SRZ Technical Specifications (continued)

Table 2 - LOOP 1/ OUTPUT 1 Commands (Continued)

PMBUS CMD	CMD CODE	DATA BYTES	DATA FORMAT	DATA UNITS	TRANSFER TYPE	DEFAULT VALUE	MIN/MAX VALUES or RANGE
VOUT_OV_FAULT_LIMIT	0x40	2	16-bit linear	V	R/W	010D (1.051V)	0.45 - 2.102
VOUT_OV_FAULT_RESPONSE	0x41	1	Bit field		R/W	80 (Shutdown)	Ignore (00), Sdown(80)
VOUT_OV_WARN_LIMIT	0x42	2	16-bit linear	V	R/W	0200 (2.000)	0.45 - 2.102
VOUT_UV_WARN_LIMIT	0x43	2	16-bit linear	V	R/W	0073 (0.449)	0.45 - 2.102
VOUT_UV_FAULT_LIMIT	0x44	2	16-bit linear	V	R	009A (0.602)	50mV to 400mV from Vout
VOUT_UV_FAULT_RESPONSE	0x45	1	Bit field		R/W	80 (shutdown)	Ignore (00), Sdown(80)
IOUT_OC_FAULT_LIMIT	0x46	2	11-bit linear	A	R/W	085B (182)	0 to 510
IOUT_OC_FAULT_RESPONSE	0x47	1	Bit field		R/W	F8 (Hiccup forever)	Sdown(C0), hiccup 6 then Sdown (F0),(F8)
IOUT_OC_WARN_LIMIT	0x4A	2	11-bit linear	A	R/W	083C (120)	0 to 510
OT_FAULT_LIMIT	0x4F	2	11-bit linear	°C	R/W	007D (125)	0 to 255
OT_FAULT_RESPONSE	0x50	1	Bit field		R/W	C0 (Autorestart)	Ignore (00), Sdown(80), (C0)
OT_WARN_LIMIT	0x51	2	11-bit linear	°C	R/W	006E (110)	64 to 255
VIN_OV_FAULT_LIMIT	0x55	2	11-bit linear	V	R/W	E0E9 (14.563)	0 to 63.9375
VIN_OV_FAULT_RESPONSE	0x56	1	Bit field		R/W	80 (Shutdown)	Ignore (00), Sdown(80)
VIN_UV_WARN_LIMIT	0x58	2	11-bit linear	V	R/W	E068 (6.5)	0 to 63.9375
IIN_OC_WARN_LIMIT	0x5D	2	11-bit linear	V	R/W	F852 (41)	0 to 127.5
POWER_GOOD_ON	0x5E	2	11-bit linear	V	R/W	0065 (0.395)	0.395 to 2.102
POWER_GOOD_OFF	0x5F	2	11-bit linear	V	R/W	0065 (0.395)	0.395 to 2.102
TON_DELAY	0x60	2	11-bit linear	ms	R/W	F800 (0)	0 to 63.5
TON_RISE	0x61	2	11-bit linear	ms	R/W	F03C (15)	0 to 31.75
TON_MAX_FAULT_LIMIT	0x62	2	11-bit linear	ms	R/W	F000 (0)	0 to 31.75
TON_MAX_FAULT_RESPONSE	0x63	1	11-bit linear	ms	R/W	00 (Ignore)	Ignore (00), Sdown(80)
TOFF_DELAY	0x64	2	11-bit linear	ms	R/W	0ms	0 to 63.5
TOFF_FALL	0x65	2	11-bit linear	ms	R/W	F800 (0)	0 to 31.75
POUT_OP_WARN_LIMIT	0x6A	2	16-bit linear	Watts	R/W	01FF (511)	
POUT_OP_WARN_LIMIT	0x6B	2	16-bit linear	Watts	R/W	01FF (511)	

MLX160A0XY3-SRZ Technical Specifications (continued)

Table 2 - LOOP 1 / OUTPUT 1 Commands (continued)

PMBUS CMD	CMD CODE	DATA BYTES	DATA FORMAT	DATA UNITS	TRANSFER TYPE	DEFAULT VALUE	MIN/MAX VALUES or RANGE
STATUS_BYTE	0x78	1	Bit field		R	Varies (03)	
STATUS_WORD	0x79	2	Bit field		R	Varies (A003)	
STATUS_VOUT	0x7A	1	Bit field		R	Varies (20)	
STATUS_IOUT	0x7B	1	Bit field		R	Varies (00)	
STATUS_INPUT	0x7C	1	Bit field		R	Varies (20)	
STATUS_TEMPERATURE	0x7D	1	Bit field		R	Varies (00)	
STATUS_CML	0x7E	1	Bit field		R	Varies (02)	
STATUS_MFR_SPECIFIC	0x80	1	Bit field		R	Varies (00)	
READ_VIN	0x88	2	11-bit linear	V	R	Varies	
READ_IIN	0x89	2	11-bit linear	A	R	Varies, 63.9A max register limit	
READ_VOUT	0x8B	2	11-bit linear	V	R	Varies	
READ_IOUT	0x8C	2	11-bit linear	A	R	Varies	
READ_TEMPERATURE_1	0x8D	2	11-bit linear	°C	R	Varies	
READ_DUTY_CYCLE	0x94	2	11-bit linear	%	R	Varies	
READ_POUT	0x96	2	11-bit linear	W	R	Varies	
READ_PIN	0x97	2	11-bit linear	W	R	Varies	
PMBUS_REVISION	0x98	1	Bit field		R	33	
MFR_ID	0x99	2	Bit field		R	4952	
MFR_MODEL	0x9A	2	Bit field		R	00A0	
MFR_REVISION	0x9B	2	Bit field		R	Varies (0012)	
MFR_DATE	0x9D	2	Bit field		R	Varies	
IC_DEVICE_ID	0xAD	1	Bit field		R	6C	
IC_DEVICE_REV	0xAE	1	Bit field		R	01	
MFR_READ_VAUX	0xC4	32	Bit field	V	R/W	Varies	
MFR_VIN_PEAK	0xC5	32	Bit field	V	R/W	Varies	
MFR_VOUT_PEAK	0xC6	32	Bit field	V	R/W	Varies	
MFR_IOUT_PEAK	0xC7	2	Bit field	A	R/W	Varies	
MFR_TEMP_PEAK	0xC8	2	Bit field	°C	R/W	Varies	
MFR_VIN_VALLEY	0xC9	2	Bit field	V	R/W	Varies	
MFR_VOUT_VALLEY	0xCA	2	Bit field	V	R/W	Varies	
MFR_IOUT_VALLEY	0xCB	2	Bit field	A	R/W	Varies	
MFR_TEMP_VALLEY	0xCC	2	Bit field	°C	R/W	Varies	
MFR_REG_ADDRESS	0xD0	7	Bit field		R-2/W-5*	Varies	
MFR_I ² C_ADDRESS	0xD6	7	Bit field		R/W	10 (10)	

*R-2/W-5 refers to the number of data bytes in the command, 5 data bytes for a Write and 2 data bytes for a Read

MLX160A0XY3-SRZ Technical Specifications (continued)

Table 3 - LOOP 2 / OUTPUT 2 – USE ONLY WHEN SATELLITE IS USED

PMBUS CMD	CMD CODE	DATA BYTES	DATA FORMAT	DATA UNITS	TRANSFER TYPE	DEFAULT VALUE	MIN/MAX VALUES or RANGE
PAGE	0x01	1	Bit field		R/W	01	01/FF
OPERATION	0x01	1	Bit field		R/W	80	00/40/80/94/98/A4/A8
ON_OFF_CONFIG	0x02	1	Bit field		R/W	1C	02/14/15/16/17/18/1C/1D/1E/1F
CLEAR_FAULTS	0x03	0			W		
WRITE_PROTECT	0x10	1	Bit field		W	0x00	
RESTORE_DEFAULT_ALL	0x12	0			W		
STORE_USER_ALL	0x15	0			W		
RESTORE_USER_ALL	0x16	0			W		
CAPABILITY	0x19	1	Bit field		R	0xB4	
SMBALERT_MASK	0x1B	2	Bit field		R/W	000100000100	
VOUT_MODE	0x20	1	mode + exp		R/W	0x18 (-8 Exponent)	-8,-9,-12
VOUT_COMMAND	0x21	2	16-bit linear	V	R/W	0073 (0.449V)	0.45 - 2.0
VOUT_TRIM	0x22	2	16-bit linear	V	R/W*	0.000V	-2 to 2
VOUT_MAX	0x24	2	16-bit linear	V	R/W	021A (2.102V)	0.45 to 2.102
VOUT_MARGIN_HIGH	0x25	2	16-bit linear	V	R/W*	0000	0 to 2.102
VOUT_MARGIN_LOW	0x26	2	16-bit linear	V	R/W*	0000	0 to 2.102
VOUT_TRANSITION_RATE	0x27	2	11-bit linear	V/ms	R/W	0xE808 (1mV/μs)	0 to 127.875mV/ μsec
VOUT_DROOP	0x28	2	11-bit linear	V	R/W	0000	0 to 9.98mΩ
VOUT_MIN	0x2B	2	11-bit linear	V	R/W	0040 (0.25V)	0 to 2.102
FREQUENCY_SWITCH	0x33	2	11-bit linear	kHz	R/W	0244 (580kHz)	
POWER_MODE	0x34	2	Bit field		R/W	0x0003 (Max Power)	0, 3, 4, 5
VIN_ON	0x35	2	11-bit linear	V	R/W	F019 (6.25)	6.25 - 14
VIN_OFF	0x36	2	11-bit linear	V	R/W	F017 (5.75)	5.75 - 14
IOUT_CAL_GAIN	0x38	2	11-bit linear	mΩ	R/W	Vary	
IOUT_CAL_OFFSET	0x39	2	11-bit linear	A	R/W	Vary	
VOUT_OV_FAULT_LIMIT	0x40	2	16-bit linear	V	R/W	010D (1.051V)	0.45 - 2.102
VOUT_OV_FAULT_RESPONSE	0x41	1	Bit field		R/W	80 (Shutdown)	Ignore (00), Sdown(80)
VOUT_OV_WARN_LIMIT	0x42	2	16-bit linear	V	R/W	0200 (2.000)	0.45 - 2.102
VOUT_UV_WARN_LIMIT	0x43	2	16-bit linear	V	R/W	0073 (0.449)	0.45 - 2.102
VOUT_UV_FAULT_LIMIT	0x44	2	16-bit linear	V	R	009A (0.602)	50mV to 400mV from Vout
VOUT_UV_FAULT_RESPONSE	0x45	1	Bit field		R/W	80 (shutdown)	Ignore (00), Sdown(80)
IOUT_OC_FAULT_LIMIT	0x46	2	11-bit linear	A	R/W	085B (182)	0 to 510
IOUT_OC_FAULT_RESPONSE	0x47	1	Bit field		R/W	F8 (Hiccup forever)	Sdown(C0), hiccup 6 then Sdown (F0), (F8)
IOUT_OC_WARN_LIMIT	0x4A	2	11-bit linear	A	R/W	083C (120)	0 to 510
OT_FAULT_LIMIT	0x4F	2	11-bit linear	°C	R/W	007D (125)	0 to 255
OT_FAULT_RESPONSE	0x50	1	Bit field		R/W	C0 (Auto restart)	Ignore (00), Sdown(80), (C0)

* Cannot be stored in NVM. Module will accept Write command but will not transfer to NVM when STORE_USER_ALL is used

† Cannot be stored in NVM. Module will hold any written value till power cycle. Cannot use RESTORE_USER_ALL to revert to default value

MLX160A0XY3-SRZ Technical Specifications (continued)

Table 3 - LOOP 2 / OUTPUT 2 - USE ONLY WHEN SATELLITE IS USED (Continued)

PMBUS CMD	CMD CODE	DATA BYTES	DATA FORMAT	DATA UNITS	TRANSFER TYPE	DEFAULT VALUE	MIN/MAX VALUES or RANGE
OT_WARN_LIMIT	0x51	2	11-bit linear	°C	R/W	006E (110)	64 to 255
VIN_OV_FAULT_LIMIT	0x55	2	11-bit linear	V	R/W	E0E9 (14.563)	0 to 63.9375
VIN_OV_FAULT_RESPONSE	0x56	1	Bit field		R/W	80 (Shutdown)	Ignore (00), Sdown(80)
VIN_UV_WARN_LIMIT	0x58	2	11-bit linear	V	R/W	E068 (6.5)	0 to 63.9375
IIN_OC_WARN_LIMIT	0x5D	2	11-bit linear	V	R/W	F852 (41)	0 to 127.5
POWER_GOOD_ON	0x5E	2	11-bit linear	V	R/W	0065 (0.395)	0.395 to 2.102
POWER_GOOD_OFF	0x5F	2	11-bit linear	V	R/W	0065 (0.395)	0.395 to 2.102
TON_DELAY	0x60	2	11-bit linear	ms	R/W	F800 (0)	0 to 63.5
TON_RISE	0x61	2	11-bit linear	ms	R/W	F03C (15)	0 to 31.75
TON_MAX_FAULT_LIMIT	0x62	2	11-bit linear	ms	R/W	F000 (0)	0 to 31.75
TON_MAX_FAULT_RESPONSE	0x62	1	11-bit linear	ms	R/W	00 (Ignore)	Ignore (00), Sdown(80)
TOFF_DELAY	0x64	2	11-bit linear	ms	R/W	0ms	0 to 63.5
TOFF_FALL	0x65	2	11-bit linear	ms	R/W	F800 (0)	0 to 31.75
POUT_OP_WARN_LIMIT	0x6A	2	16-bit linear	Watts	R/W	01FF (511)	
PIN_OP_WARN_LIMIT	0x6B	2	16-bit linear	Watts	R/W	01FF (511)	
STATUS_BYTE	0x78	1	Bit field		R	Varies (03)	
STATUS_WORD	0x79	2	Bit field		R	Varies (A003)	
STATUS_VOUT	0x7A	1	Bit field		R	Varies (20)	
STATUS_IOUT	0x7B	1	Bit field		R	Varies (00)	
STATUS_INPUT	0x7C	1	Bit field		R	Varies (20)	
STATUS_TEMPERATURE	0x7D	1	Bit field		R	Varies (00)	
STATUS_CML	0x7E	1	Bit field		R	Varies (02)	
STATUS_MFR_SPECIFIC	0x80	1	Bit field		R	Varies (00)	
READ_VIN	0x88	2	11-bit linear	V	R	Varies	
READ_IIN	0x89	2	11-bit linear	A	R	Varies, 63.9A max register limit	
READ_VOUT	0x8B	2	11-bit linear	V	R	Varies	
READ_IOUT	0x8C	2	11-bit linear	A	R	Varies	
READ_TEMPERATURE_1	0x8D	2	11-bit linear	°C	R	Varies	
READ_DUTY_CYCLE	0x94	2	11-bit linear	%	R	Varies	
READ_POUT	0x96	2	11-bit linear	W	R	Varies	
READ_PIN	0x97	2	11-bit linear	W	R	Varies	
PMBUS_REVISION	0x98	1	Bit field		R	33	
MFR_ID	0x99	2	Bit field		R/W	4952	
MFR_MODEL	0x9A	2	Bit field		R/W	00A0	
MFR_REVISION	0x9B	2	Bit field		R/W	Varies (0012)	
MFR_DATE	0x9D	2	Bit field		R/W	Varies	
IC_DEVICE_ID	0xAD	1	Bit field		R	6C	
IC_DEVICE_REV	0xAE	1	Bit field		R	01	
MFR_READ_VAUX	0xC4	32	Bit field	V	R/W	Varies	
MFR_VIN_PEAK	0xC5	32	Bit field	V	R/W	Varies	
MFR_VOUT_PEAK	0xC6	32	Bit field	V	R/W	Varies	
MFR_IOUT_PEAK	0xC7	2	Bit field	A	R/W	Varies	
MFR_TEMP_PEAK	0xC8	2	Bit field	°C	R/W	Varies	
MFR_VIN_VALLEY	0xC9	2	Bit field	V	R/W	Varies	
MFR_VOUT_VALLEY	0xCA	2	Bit field	V	R/W	Varies	
MFR_IOUT_VALLEY	0xCB	2	Bit field	A	R/W	Varies	
MFR_TEMP_VALLEY	0xCC	2	Bit field	°C	R/W	Varies	
MFR_REG_ACCESS	0xD0	7	Bit field		R-2/W-5	Varies	
MFR_I ² C_ADDRESS	0xD6	7	Bit field		R/W	10 (10)	

MLX160A0XY3-SRZ Technical Specifications (continued)

Quick Start process — Single MLX160 on PMBus with external ENABLE

1. Keep VR_EN pulled High to keep Output OFF
2. Power up module
3. Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**.
4. Configure the following if needed:
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
5. If Module has to be turned on using ON/OFF command use ON_OFF_CONFIG **0x02** to change setting.
6. If Changes are final and Configuration has to be stored in NVM use, STORE_USER_ALL **0x15**
 - Pull VR_EN low to turn on module output.

Quick Start process — Single MLX160 on PMBus with no external ENABLE control and two level voltage setup

1. VR_EN is tied to GND as instructed in this document.
2. Power up module.
3. Module will start-up to 0.45V.
4. Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**.
5. Configure the following if needed.
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
6. If Module has to be turned on using ON/OFF command use ON_OFF_CONFIG **0x02** to change setting.
7. If Changes are final and Configuration has to be stored in NVM use, STORE_USER_ALL **0x15**.

Quick Start process — Single MLX160 on PMBus with no external ENABLE control and needing output voltage other than 0.45V at start-up

1. VR_EN is pulled upto 3.3V. 3.3V Source from module can be used with 10K resistor pull-up. This will keep Output Off when module is powered ON.
2. Power up module
3. Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**
4. Configure the following if needed:
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
5. Configure OPERATION command to OFF (**0x00**) instead of the always ON(**0x80**) if ON/OFF control is desired through PMBus or else module will start up whenever Module receives input power in the future
6. Configure ON_OFF_CONFIG **0x02** to change setting to **0x18** which will turn on or off module whenever commanded through the OPERATION COMMAND and ignore the ENABLE Pin
7. If OPERATION COMMAND has been left at Always ON then module will turn on unless the OPERATION COMMAND was previously changed to OFF
8. If Changes are final and Configuration has to be stored in NVM use, STORE_USER_ALL **0x15**
9. Issue ON Command through OPERATION COMMAND (if it was previously set to OFF) to turn on module OUTPUT

MLX160A0XY3-SRZ Technical Specifications (continued)

Example for 3 modules on same PMBus Channel

Quick Start process - Multiple MLX modules on same PMBus, same fixed offset resistor - 0.845kΩ

Command Name and explanation in parenthesis	Address Offset	Application: Common, Loop1 or Loop2	Description, Range	Default Value
i2c_device_addr (Sets the I2C device address. If set to 0, the I2C interface is effectively disabled. In test mode, the chip also accepts a default value of 0x14. Locked by register i2c_pmb_addr_lock)	D0 0020 [14:8]	COMMON	Sets the I2C device address. If set to 0, the I2C interface is effectively disabled. In test mode, the chip also accepts a default value of 0x14. Locked by register i2c_pmb_addr_lock. Reserved I2C addresses: (0x00 to 0x07), 0x08, 0x0c, 0x28, 0x37, 0x61, (0x78 to 0x7f).	10 (16)
pmb_device_addr (Sets the PMBus device address. If set to 0, the PMBus interface is effectively disabled)	D0 0020 [6:0]	COMMON	Set this bit to lock I2C and PMBus address registers 0-->Unlock I2C and PMBus address 1-->Lock I2C and PMBus address	40 (64)
I2C/PMBUS Address lock (Set this bit to lock I2C and PMBus address registers)	D0 0094 [2:2]	COMMON	Set this bit to lock I2C and PMBus address registers 0-->Unlock I2C and PMBus address 1-->Lock I2C and PMBus address	01 (1)

Above screenshot is from PMBus Applications Note for this family. It is available on Webpage.

- Power up module 1
- Configure address using advanced D0 command also explained in MLX/SLX PMBus application note. Set register 0x0020[14:18]=12h and register 0x0020[6:0]=42h, to assign module 1 with I2C address=12h and PMBus address =42h.
- Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**
- Configure the following if needed:
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
- If Module default ON/OFF operation has to be changed, use ON_OFF_CONFIG **0x02** to change setting.
- If Changes are final and Configuration has to be stored in NVM use, STORE_USER_ALL **0x15**
- Power up module 2
Module 2 - set register 0x0020[14:18]=11h and register 0x0020[6:0]=41h, to assign module 2 with I2C address=11h and PMBus address =41h
- Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**

- Configure the following if needed:
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
- If Module default ON/OFF operation has to be changed, use ON_OFF_CONFIG **0x02** to change setting
- If Changes are final and Configuration has to be stored in NVM, use STORE_USER_ALL **0x15**
- Power up module 3
Keep default I2C address=10h and PMBus address =40h
- Configure required output voltage through PAGE **0x00** and VOUT_COMMAND **0x21**
- Configure the following if needed:
 - VOUT_OV_FAULT_RESPONSE **0x41**
 - VOUT_OV_FAULT_LIMIT **0x40**
 - VOUT_OV_WARN_LIMIT **0x42**
- If Changes are final and Configuration has to be stored in NVM, use STORE_USER_ALL **0x15**

MLX160A0XY3-SRZ Technical Specifications (continued)

Layout considerations

The evaluation board layout and schematic files are available for interested users. These can be downloaded through the webpage or by contacting our Field Applications Engineer through the help section of the webpage. The electrical and the thermal characterization of the MLX160A0XY3-SRZ module has been done on evaluation boards with layout as shown in Fig28.

The entire MLX series has a central controller section and symmetrical power switching sections on each side of the controller depending on the power rating.

For Thermal and Current Carrying reasons, it is recommended to have four 20 mil heavy plated filled vias on each of the power pins. Copper plating of vias should be 2 mils if possible.

1. 12 mil vias are recommended for all Signal Pins.
2. Additional thermal vias can be placed on ground plane around module and signal pins.
3. Input Voltage for each of the phases can be laid out on the same layer as shown below:

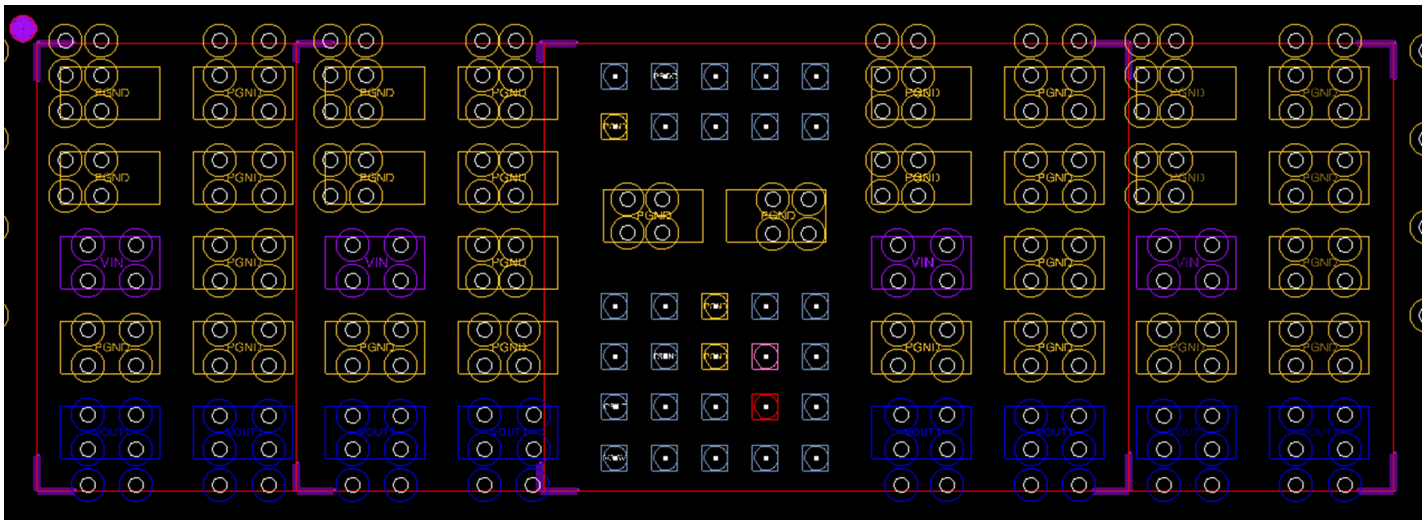


Figure 28. Example of Pad Layout with Vias

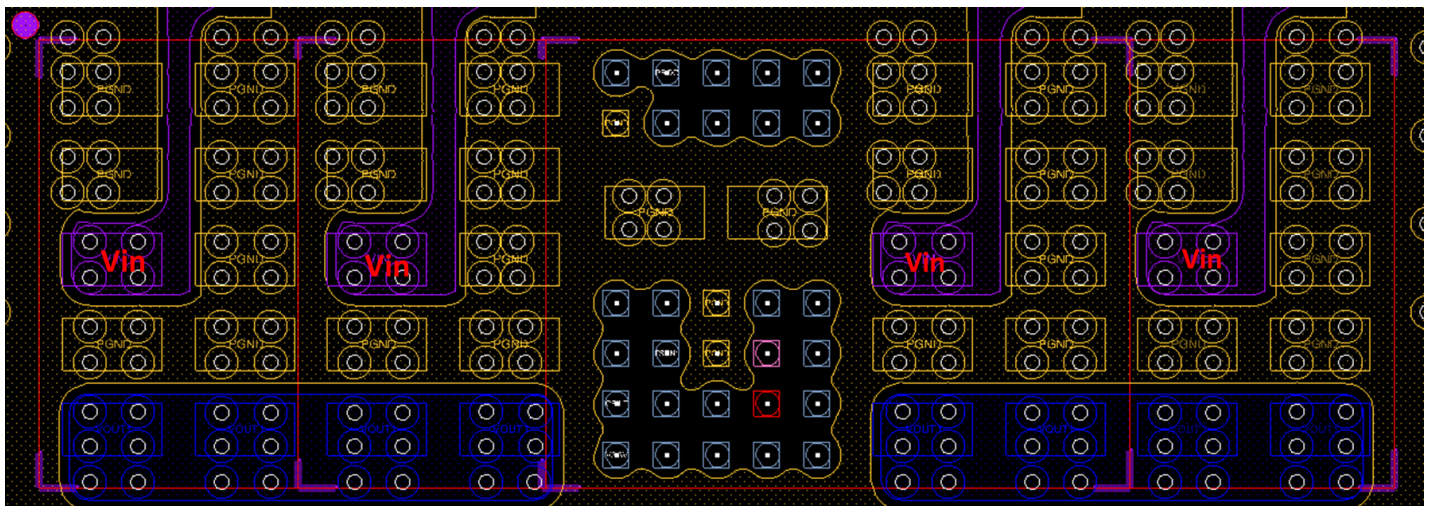


Figure 29. Example of Pad Layout with Vias

MLX160A0XY3-SRZ Technical Specifications (continued)

Layout considerations (continued)

- It is possible to split the grounds at this location based on customer design layout practices; the POL module has a single ground.

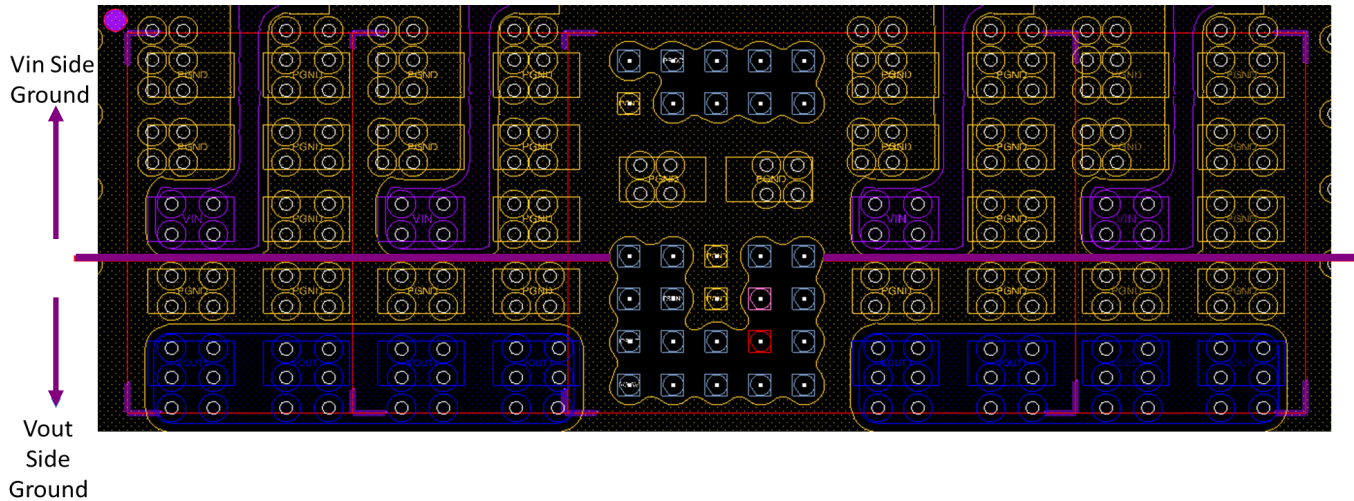


Figure 30. Example of split input-output ground

- Place a minimum of 10 μ f and 1 μ f input capacitor on the bottom side of the customer board directly under V_{in} and keep additional input capacitance as close to V_{in} under each of the phases. Additional input capacitance can be placed on top surface of board. All phases need to have same amount of input capacitance.

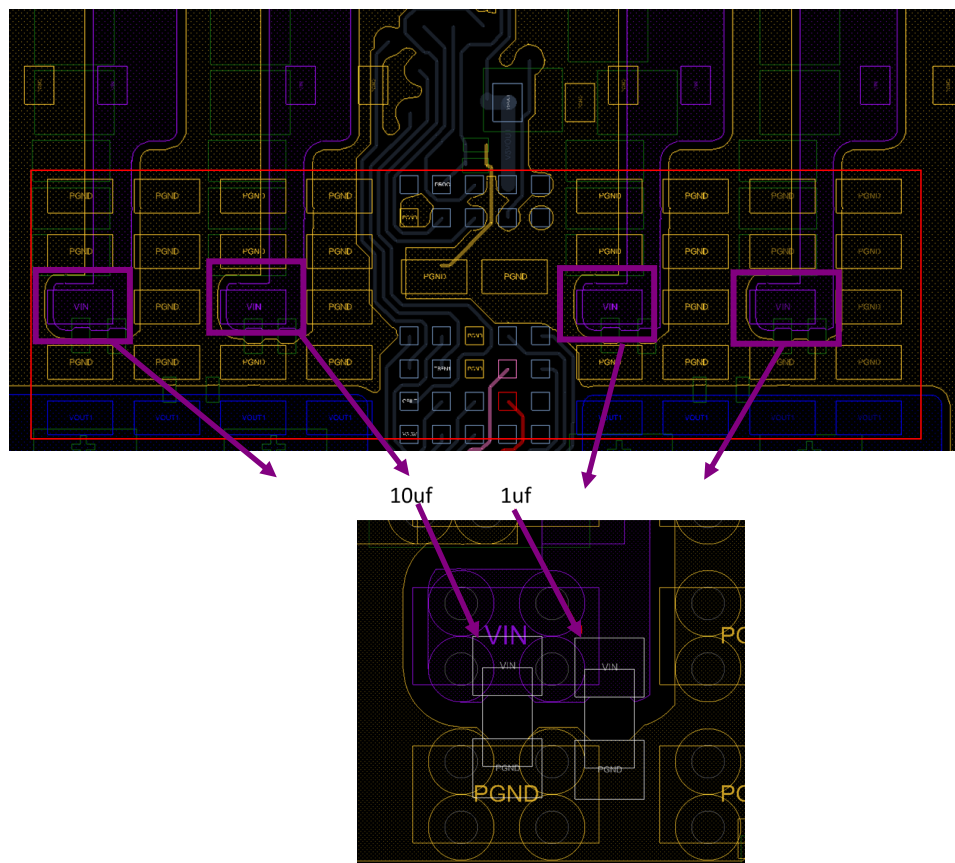


Figure 31. Example of Input capacitor placement and routing

MLX160A0XY3-SRZ Technical Specifications (continued)

Layout considerations (continued)

6. Input capacitance for each of the phases is recommended to be as close as possible to the V_{in} of the module.

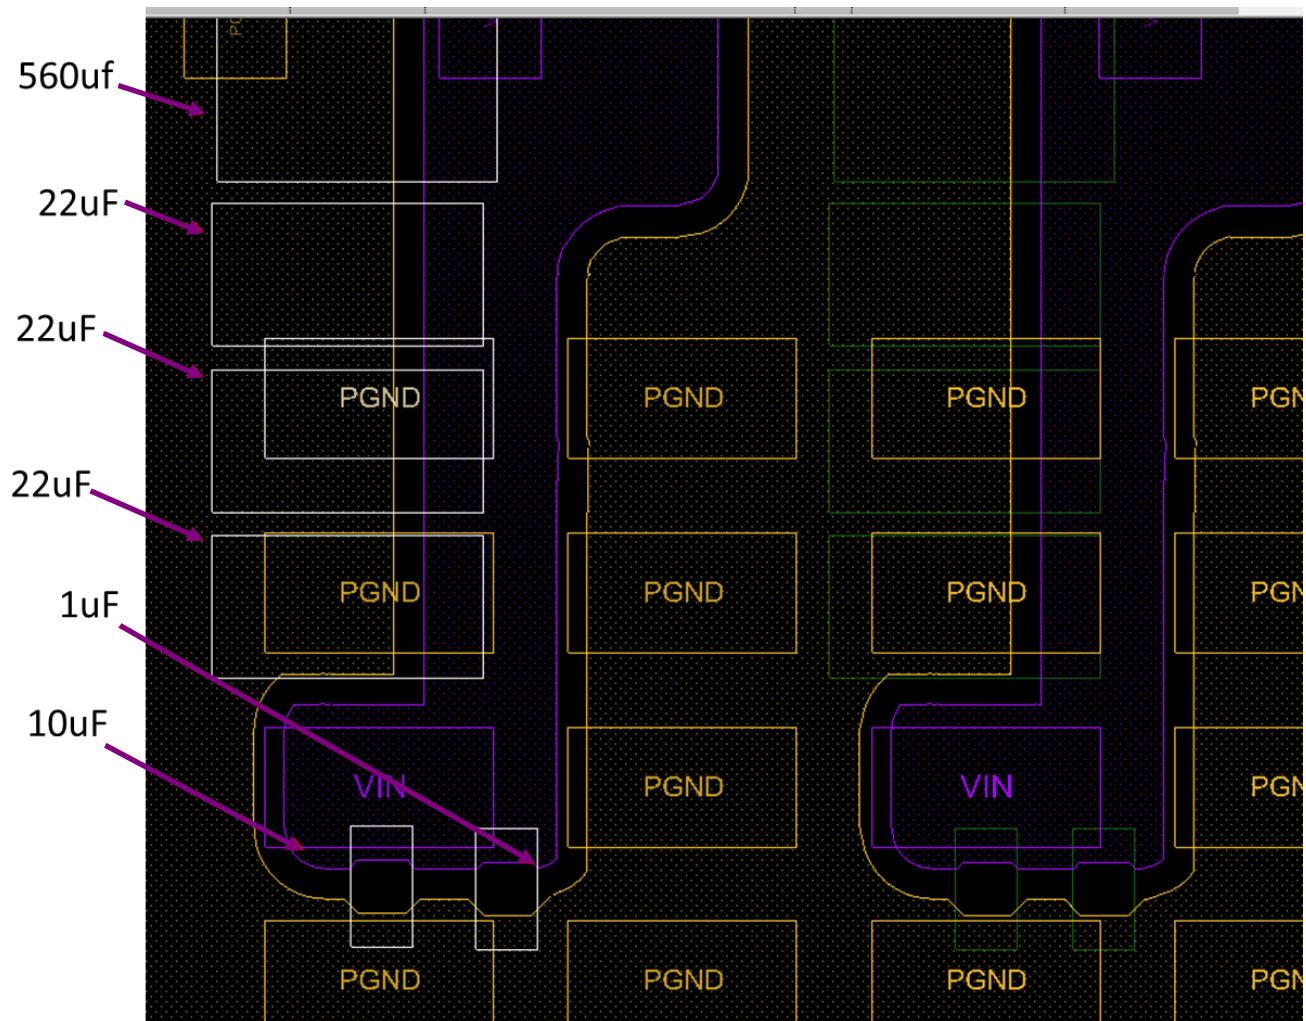


Figure 32. Input Capacitor Placing

MLX160A0XY3-SRZ Technical Specifications (continued)

Layout considerations (continued)

- Sense traces must be routed differentially with a 5mil air gap spacing. Also provide ground plane under remote sensing pairs.


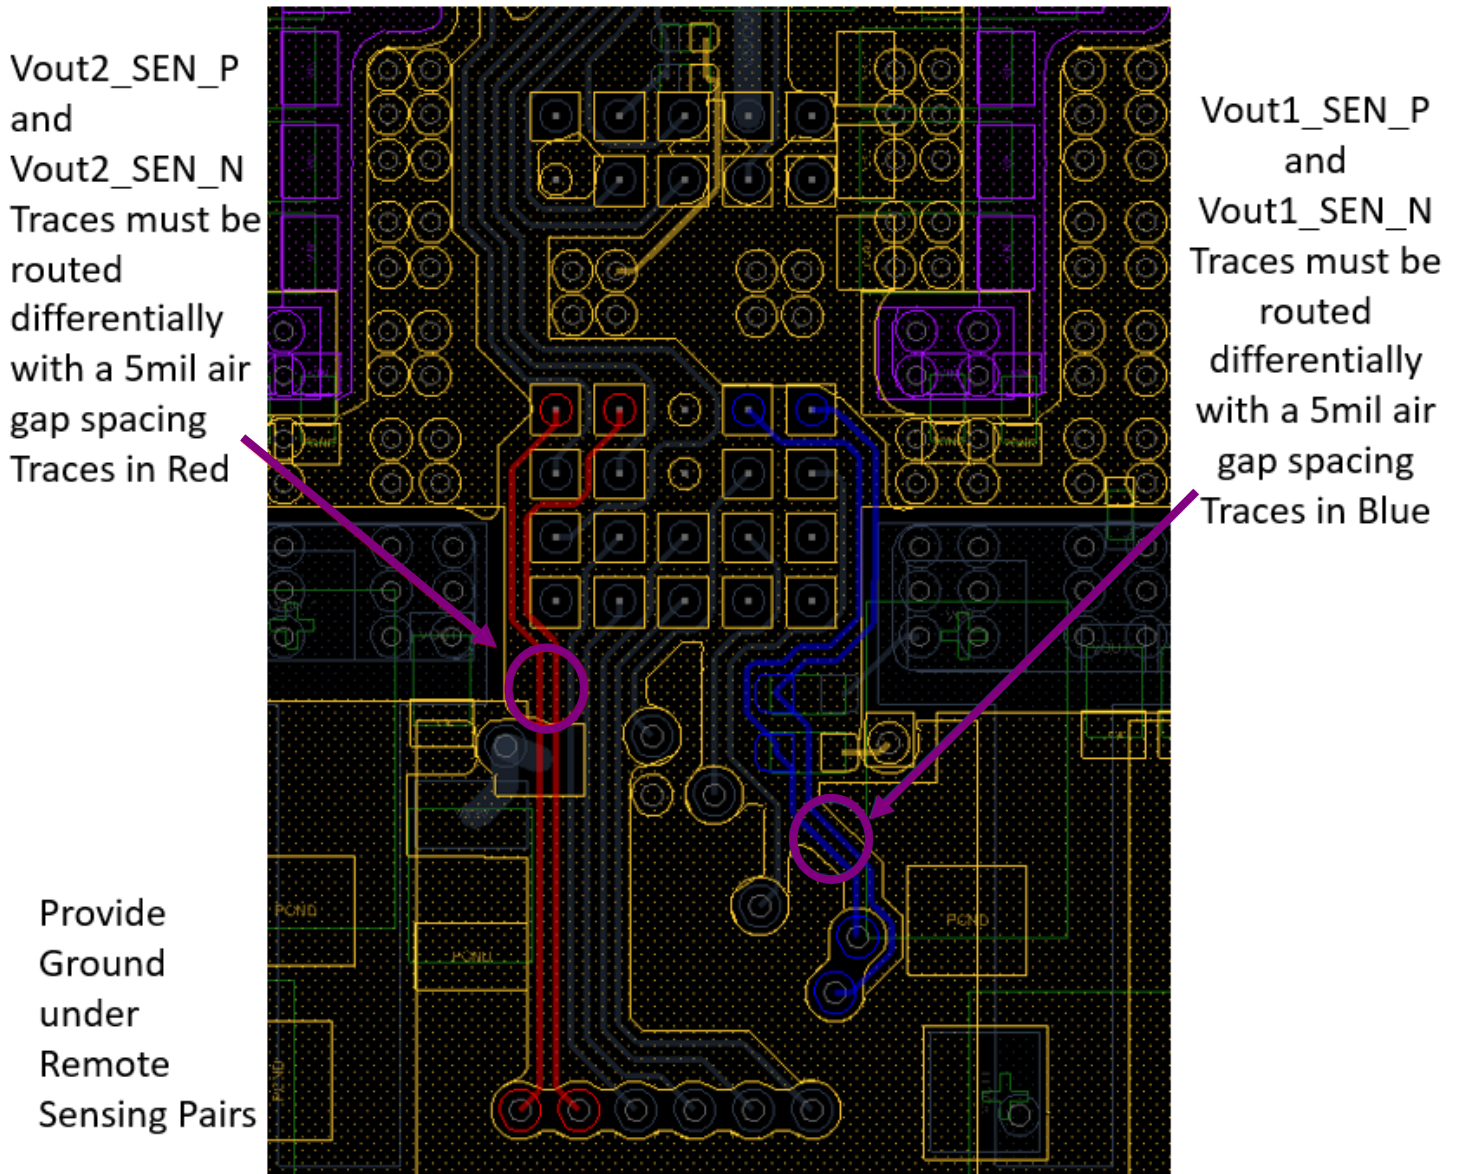


Figure 33 : VSense Traces

MLX160A0XY3-SRZ Technical Specifications (continued)

Recommended Pad Layout and Pin Description

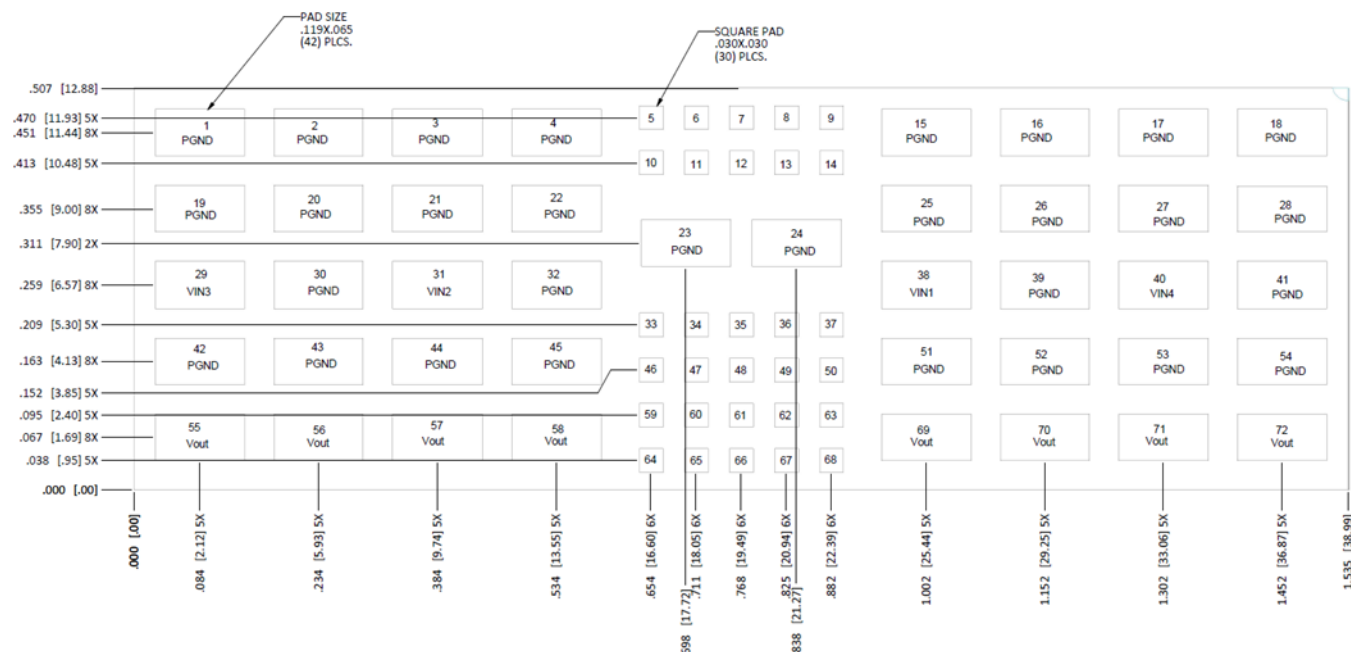

PIN	FUNCTION	PIN	FUNCTION
1	PGND	37	VOUTI_SEN_P
2	PGND	38	VIN1
3	PGND	39	PGND
4	PGND	40	VIN4
5	WARN#/GP	41	PGND
6	PROG	42	PGND
7	IMON7_SAT_L1/IMON2_SAT_L2	43	PGND
8	V5V	44	PGND
9	PGOOD2	45	PGND
10	PGND	46	TSEN_SAT_L2
11	IMON8_SAT_L1/IMON1_SAT_L2	47	TSEN1
12	IMON6_SAT_L1/IMON3_SAT_L2	48	PGND
13	IMON5_SAT_L1/IMON4_SAT_L2	49	VR_EN1
14	VR_EN2	50	VRHOT
15	PGND	51	PGND
16	PGND	52	PGND
17	PGND	53	PGND
18	PGND	54	PGND
19	PGND	55	VOUT
20	PGND	56	VOUT
21	PGND	57	VOUT
22	PGND	58	VOUT
23	PGND	59	CFILT
24	PGND	60	PWM7_SAT_L1/PWM2_SAT_L2
25	PGND	61	PWM6_SAT_L1/PWM3_SAT_L2
26	PGND	62	SM_DAT
27	PGND	63	PGOOD1
28	PGND	64	V3.3V
29	VIN3	65	PWM8_SAT_L1/PWM1_SAT_L2
30	PGND	66	PWM5_SAT_L1/PWM4_SAT_L2
31	VIN2	67	SM_CLK
32	PGND	68	SM_ALERT
33	VOUT2_SAT_L2_SEN_P	69	VOUT
34	VOUT2_SAT_L2_SEN_N	70	VOUT
35	PGND	71	VOUT
36	VOUTI_SEN_N	72	VOUT

MLX160A0XY3-SRZ Technical Specifications (continued)

Pin Assignment Table

Pin	Label	Type	Description
1	PGND	PWR	Ground Reference for the module, Rail Return.
2	PGND	PWR	Ground Reference for the module, Rail Return.
3	PGND	PWR	Ground Reference for the module, Rail Return.
4	PGND	PWR	Ground Reference for the module, Rail Return.
5	WARN#/GP	Digital-Output	Warning Output - Open-drain active low alert pin that is pre-configured to indicate an Output Over-current Warning. Can use V3.3V from module to pullup using a resistor.
6	PROG	Analog-Input	Configuration Pointer or Bus Address Offset. A resistor to ground on this pin points to the specific configuration file to be loaded into the OTP during power up (along with a 0.01 μ F cap in parallel with the resistor). Additionally this pin can be used to set an address offset to the I ² C and PMBus addresses.
7	IMON7_SAT_L1/ IMON2_SAT_L2	Analog-Input	Phase 7 Loop#1 / Phase 2 Loop#2 Current Sense Input. Phase 7 Loop#1 / Phase 2 Loop#2 sensed current input (+). Float or connect to ground if not used
8	V5V	O	Auxiliary 5V low power bus.
9	PGOOD2	Digital-Output	Voltage Regulator Ready Output (Loop #2). Open-drain output that asserts high when the VR has completed soft-start to Loop #2 boot voltage. Pull up to an external voltage through a resistor.
10	PGND	PWR	Ground Reference for the module, Rail Return.
11	IMON8_SAT_L1/ IMON1_SAT_L2	Analog-Input	Phase 8 Loop#1 / Phase 1 Loop#2 Current Sense Input. Phase 8 Loop#1 / Phase 1 Loop#2 sensed current input (+). Float or connect to ground if not used.
12	IMON6_SAT_L1/ IMON3_SAT_L2	Analog-Input	Phase 6 Loop#1 / Phase 3 Loop#2 Current Sense Input. Phase 6 Loop#1 / Phase 3 Loop#2 sensed current input (+). Float or connect to ground if not used.
13	IMON5_SAT_L1/ IMON4_SAT_L2	Analog-Input	Phase 5 Loop#1 / Phase 4 Loop#2 Current Sense Input. Phase 5 Loop#1 / Phase 4 Loop#2 sensed current input (+). Float or connect to ground if not used.
14	VR_EN2	Digital-Input	Enable Input for Loop #2. Cannot be left floating. Must be pulled high or low.
15	PGND	PWR	Ground Reference for the module, Rail Return.
16	PGND	PWR	Ground Reference for the module, Rail Return.
17	PGND	PWR	Ground Reference for the module, Rail Return.
18	PGND	PWR	Ground Reference for the module, Rail Return.
19	PGND	PWR	Ground Reference for the module, Rail Return.
20	PGND	PWR	Ground Reference for the module, Rail Return.
21	PGND	PWR	Ground Reference for the module, Rail Return.
22	PGND	PWR	Ground Reference for the module, Rail Return.
23	PGND	PWR	Ground Reference for the module, Rail Return.
24	PGND	PWR	Ground Reference for the module, Rail Return.
25	PGND	PWR	Ground Reference for the module, Rail Return.
26	PGND	PWR	Ground Reference for the module, Rail Return.
27	PGND	PWR	Ground Reference for the module, Rail Return.
28	PGND	PWR	Ground Reference for the module, Rail Return.
29	VIN3	Input	Input voltage rail. Recommended total input capacitance 4 x 560 μ F (electrolytic), 16 x 22 μ F, 16 x 10 μ F, 8 x 1 μ F.
30	PGND		Ground Reference for the module, Rail Return.
31	VIN2	Input	Input voltage rail. Recommended total input capacitance 4 x 560 μ F (electrolytic), 16 x 22 μ F, 16 x 10 μ F, 8 x 1 μ F.
32	PGND	PWR	Ground Reference for the module, Rail Return.
33	VOUT2_SAT_L2_ SEN_P	Analog-Input	Voltage Sense Input Loop#2. This pin is connected directly to the output voltage of Loop #2 at the load and should be routed differentially with VOUT2_SAT_L2_SEN_N.
34	VOUT2_SAT_L2_ SEN_N	Analog-Input	Voltage Sense Return Input Loop#2. This pin is connected directly to Loop#2 ground at the load and should be routed differentially with VOUT2_SAT_L2_SEN_P.

See Application Circuit and Layout Guidelines in this Datasheet for more information.

MLX160A0XY3-SRZ Technical Specifications (continued)

Pin Assignment Table (continued)

Pin	Label	Type	Description
35	PGND	PWR	Ground Reference for the module, Rail Return.
36	VOUT1_SEN_N	Analog-Input	Voltage Sense Return Input Loop#1. This pin is connected directly to Loop#1 ground at the load and should be routed differentially with VOUT1_SEN_P.
37	VOUT1_SEN_P	Analog-Input	Voltage Sense Input Loop#1. This pin is connected directly to the VR output voltage of Loop #1 at the load and should be routed differentially with VOUT1_SEN_N.
38	VIN1	Input	Input voltage rail. Recommended total input capacitance 4 x 560μF (electrolytic), 16 x 22 μF, 16x 10μF, 8x 1 μF.
39	PGND	PWR	Ground Reference for the module, Rail Return.
40	VIN4	Input	Input voltage rail. Recommended total input capacitance 4 x 560μF (electrolytic), 16 x 22 μF, 16x 10μF, 8x 1 μF.
41	PGND	PWR	Ground Reference for the module, Rail Return.
42	PGND	PWR	Ground Reference for the module, Rail Return.
43	PGND	PWR	Ground Reference for the module, Rail Return.
44	PGND	PWR	Ground Reference for the module, Rail Return.
45	PGND	PWR	Ground Reference for the module, Rail Return.
46	TSEN_SAT_L2	Analog-Input	Temperature Sense Input Loop #2. An NTC network or a temperature reporting output from a satellite can be connected to this pin to measure temperature for VRHOT. If Loop #2 is NOT used: Ground this pin. If Loop #2 is used: Connect this pin to the TSEN"X"_SAT_L2 pin(s) of the satellite(s)
47	TSEN1	Analog-Input	External Temperature sense input (NTC network) for Satellite Unit on Loop 1. If no satellites are added to Loop #1: Leave this pin floating. If additional satellites are added in Loop #1: Connect this pin to the TSEN"X"_SAT_L1 pin(s) of the satellite(s).
48	PGND	PWR	Ground Reference for the module, Rail Return.
49	VR_EN1	Digital - Input	VR Enable Input (Loop #1). VR ENABLE is used to power-on the regulator provided Vin is present. When the controller is disabled, the controller de-asserts PGOOD1 and shuts down. Cannot be left floating. Must be pulled high or low. Can use 3.3V from module to pullup using a resistor.
50	VRHOT	Digital - Output	VRHOT# Output. Active low alert pin that is programmed to assert if the temperature exceeds threshold. Can use 3.3V from module to pullup using a resistor.
51	PGND	PWR	Ground Reference for the module, Rail Return.
52	PGND	PWR	Ground Reference for the module, Rail Return.
53	PGND	PWR	Ground Reference for the module, Rail Return.
54	PGND	PWR	Ground Reference for the module, Rail Return.
55	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer), 73 x 47 μF, 15 x 22 μF, 4 x 0.1μF, 4 x 0.047μF, 1 x 0.022μF, 1 x 2200pF, 1 x 1500pF.
56	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer), 73 x 47 μF, 15 x 22 μF, 4 x 0.1μF, 4 x 0.047μF, 1 x 0.022μF, 1 x 2200pF, 1 x 1500pF.
57	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer), 73 x 47 μF, 15 x 22 μF, 4 x 0.1μF, 4 x 0.047μF, 1 x 0.022μF, 1 x 2200pF, 1 x 1500pF.
58	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer), 73 x 47 μF, 15 x 22 μF, 4 x 0.1μF, 4 x 0.047μF, 1 x 0.022μF, 1 x 2200pF, 1 x 1500pF.
59	CFILT	Output	1.8 V Decoupling.
60	PWM7_SAT_L1/ PWM2_SAT_L2	Analog - Output	Loop 2 Phase 2 or Loop 1 Phase 7 Pulse Width Modulation Output. PWM signal pin which is connected to the input of an external MOSFET gate driver. The power-up state is high-impedance until VR_EN2 goes active. Float if not used.


MLX160A0XY3-SRZ Technical Specifications (continued)

Pin Assignment Table (continued)

Pin	Label	Type	Description
61	PWM6_SAT_L1/ PWM3_SAT_L2	Analog - Output	Loop 2 Phase 3 or Loop 1 Phase 6 Pulse Width Modulation Output. PWM signal pin which is connected to the input of an external MOSFET gate driver. The power-up state is high-impedance until VR_EN2 goes active. Float if not used.
62	SM_DAT	Digital- Bidirectional	Serial Data Line I/O. I ² C/SMBus/PMBus bi-directional serial data line. Ground if not used. Requires a pull-up resistor to a V3.3V or 5V source. Can use V3.3V from module to pullup using a resistor.
63	PGOOD1	Digital- Output	Voltage Regulator Ready Output (Loop #1). Open-drain output that asserts high when the module has completed soft-start to Loop #1 setpoint voltage. Can use V3.3V from module to pullup using a resistor.
64	V3.3V	Output	Auxiliary V3.3V low power bus.
65	PWM8_SAT_L1/ PWM1_SAT_L2	Analog- Output	Loop 2 Phase 1 or Loop 1 Phase 8 Pulse Width Modulation Output. PWM signal pin which is connected to the input of an external MOSFET gate driver. The power-up state is high-impedance until VR_EN2 goes active. Float if not used.
66	PWM5_SAT_L1/ PWM4_SAT_L2	Analog- Output	Loop 2 Phase 4 or Loop 1 Phase 5 Pulse Width Modulation Output. PWM signal pin which is connected to the input of an external MOSFET gate driver. The power-up state is high-impedance until VR_EN2 goes active. Float if not used.
67	SM_CLK	Digital-Input	Serial clock. Connect to external host and/or to other modules. Can use V3.3V from module to pullup using a resistor. The interface is rated to 1 MHz.
68	SM_ALERT	Digital- Output	SMBus/PMBus Alert Line. Active low alert pin to indicate that the regulator status has changed. Requires a pull-up. Can use V3.3V from module to pullup using a resistor. If not used, GND this pin.
69	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer) 73 x 47 μF 15 x 22 μF 4 x 0.1μF 4 x 0.047μF 1 x 0.022μF 1 x 2200pF 1 x 1500pF.
70	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer) 73 x 47 μF 15 x 22 μF 4 x 0.1μF 4 x 0.047μF 1 x 0.022μF 1 x 2200pF 1 x 1500pF.
71	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer) 73 x 47 μF 15 x 22 μF 4 x 0.1μF 4 x 0.047μF 1 x 0.022μF 1 x 2200pF 1 x 1500pF.
72	VOUT	Output	Output voltage rail. Connect to output filter capacitors. Recommended total output capacitance 6 x 470μF (polymer) 73 x 47 μF 15 x 22 μF 4 x 0.1μF 4 x 0.047μF 1 x 0.022μF 1 x 2200pF 1 x 1500pF.

MLX160A0XY3-SRZ Mechanical Specifications

Physical dimensions

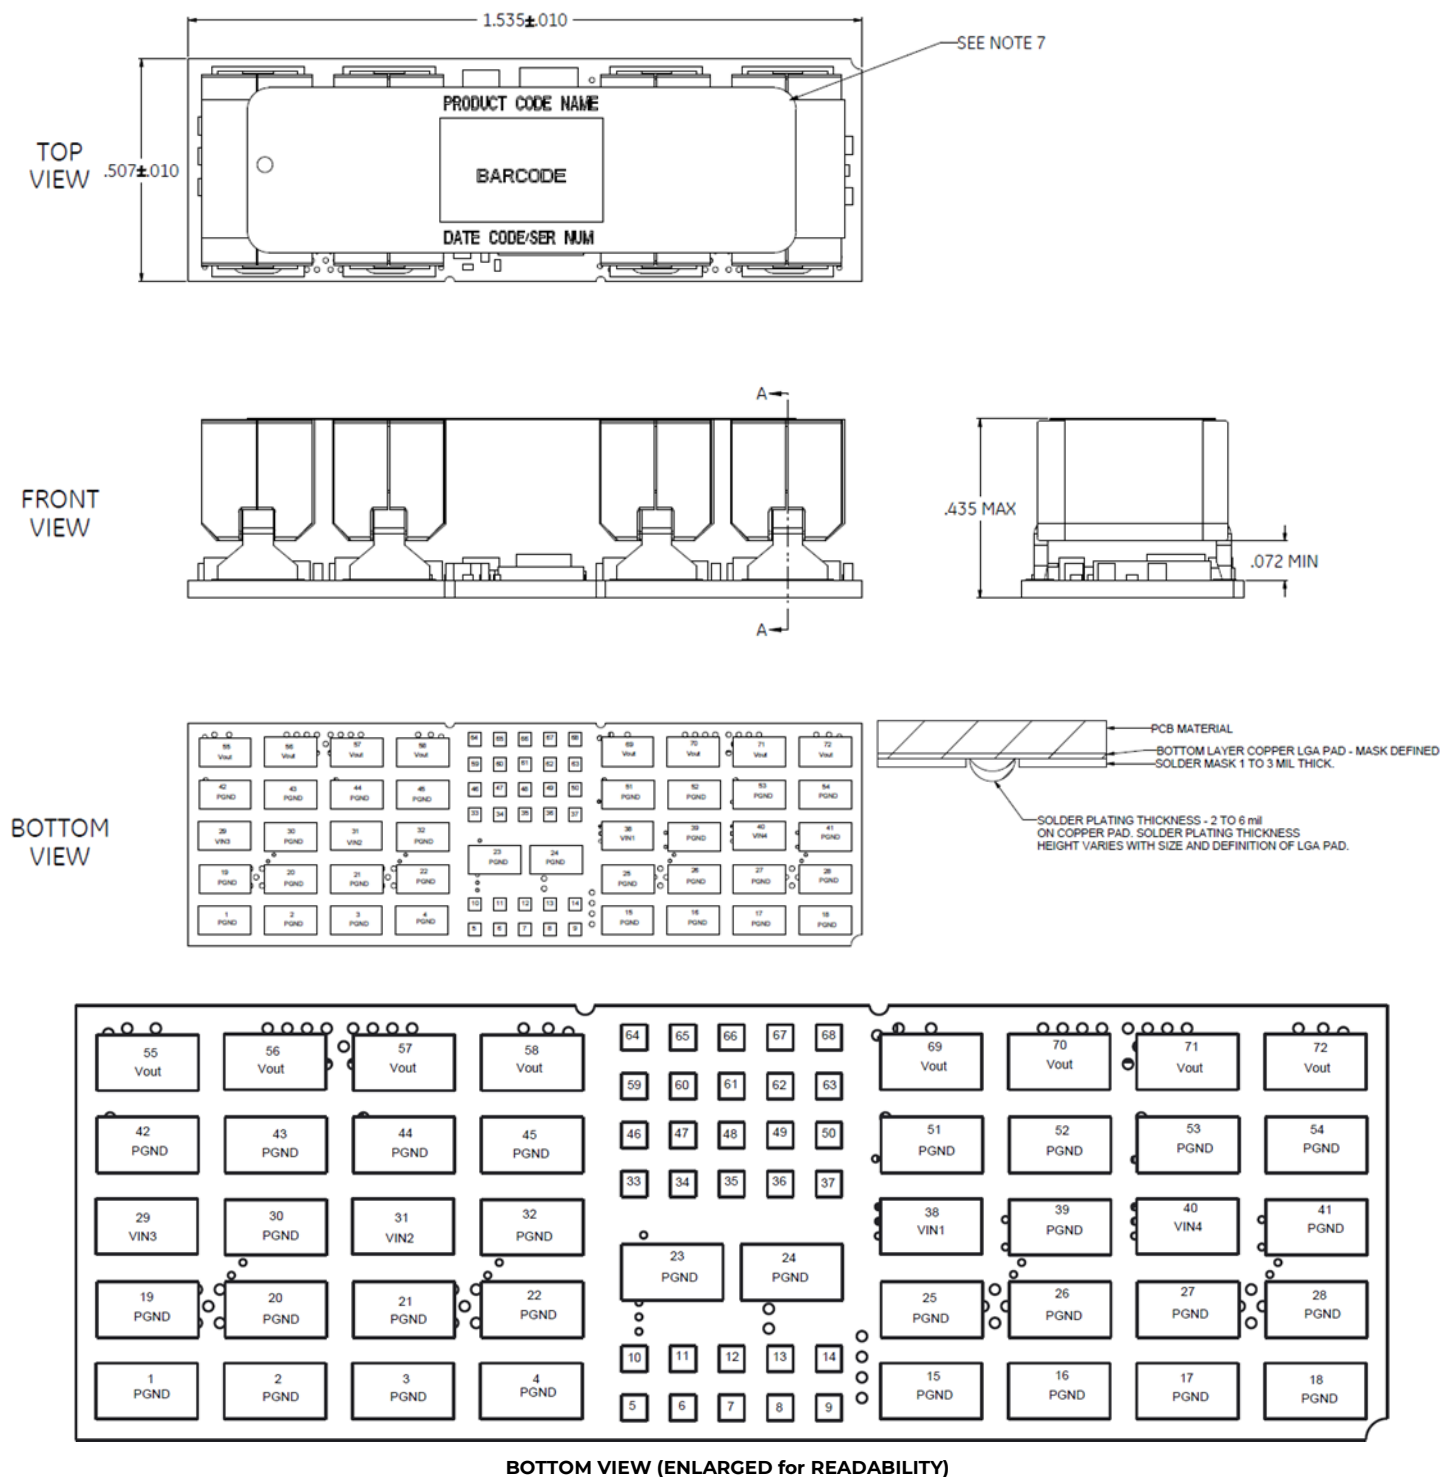


MLX160A0XY3-SRZ Technical Specifications (continued)

Application Circuit (Based on Evaluation Board)

$V_{IN} = 12V$

$V_{out} = 1V_{out}$

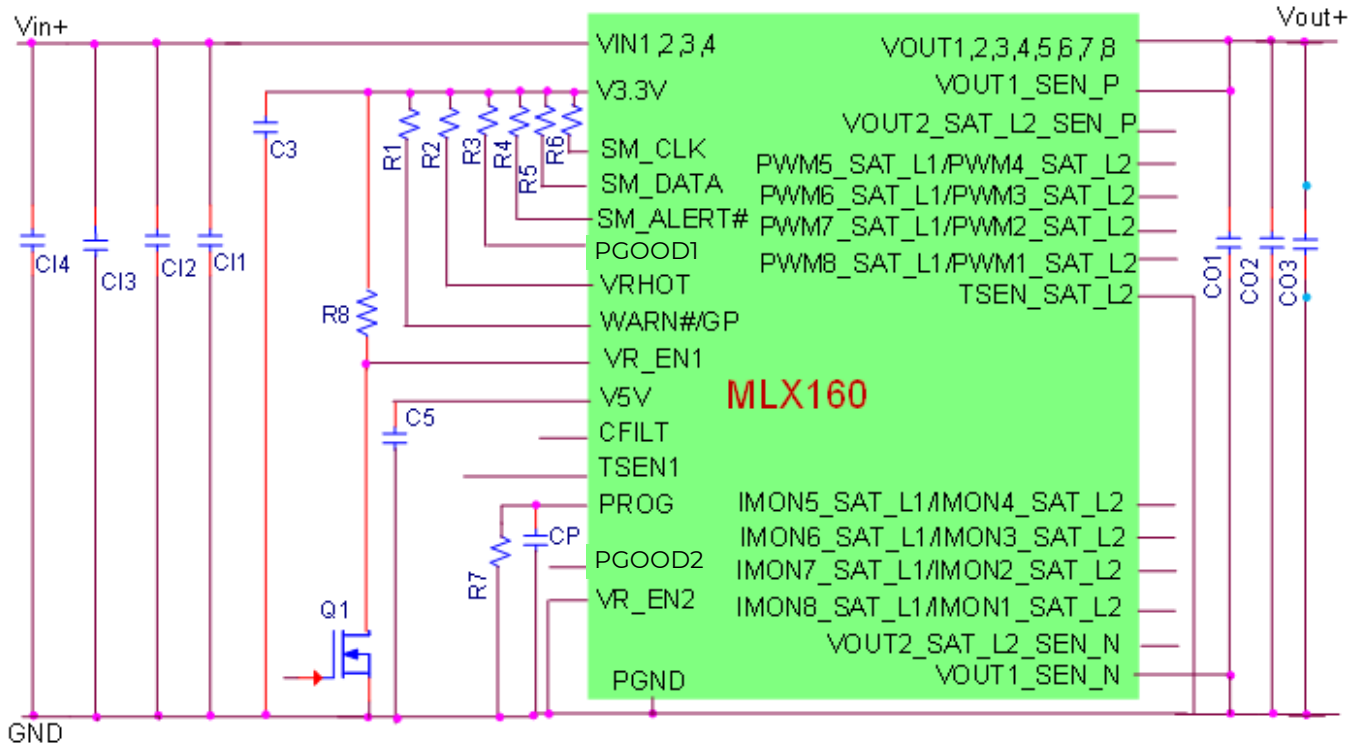

C11 – 4 banks (1 μ F + 1 μ F ceramic) – 8 caps total

C12 – 4 Banks (4 x 10 μ F ceramic) – 16 caps total

C13 – 4 Banks (4 x 22 μ F ceramic) – 16 caps total

C14 – 4 Banks (1 x 560 μ F electrolytic) – 4 caps total

CO1 – 4 x 0.047 μ F + 4 x 0.1 μ F - ceramic

CO2 – 15 x 22 μ F ceramic + 73 x 47 μ F ceramic + 6 x 470 μ F polymer or electrolytic

CO3 – 1 x 1500pF(0402) + 1 x 2200pF(0402) + 1 x 0.022 μ F(0402) + 0.1 μ F(0402) – all ceramic R8 based on Q1

R1, R2, R3 = 10K

R4, R5, R6 – based on PMBus controller / dongle being used

R7 – 845 Ω

C3 – 1 x 10 μ F + 1 x 22 μ F

C5 – 1 x 10 μ F + 1 x 22 μ F

CP – 0.01 μ F

TSEN1 :- If no satellites are added to Loop #1: Leave this pin floating.

If additional satellites are added in Loop #1: Connect this pin to the TSEN"X"_SAT_L1 pin(s) of the satellite(s)

TSEN_SAT_L2 :- If Loop #2 is NOT used: Ground this pin.

If Loop #2 is used: Connect this pin to the TSEN"X"_SAT_L2 pin(s) of the satellite(s)

SM_ALERT to be connected to Ground if not being used/monitored

PWMx_SATx_ are to be used only if Satellite is being used

IMONx_SATx are to be used only if Satellite is being used

VOUT2_SAT_L2_SEN_x are to be used only if Satellite is being used

CFILT, VR_EN2 are to be used only if Satellite is being used

VR_EN1 and VR_EN2 cannot be left floating

MLX160A0XY3-SRZ Technical Specifications (continued)

Thermal Considerations

Power modules operate in a variety of thermal environments; however, sufficient cooling should always be provided to help ensure reliable operation. Considerations include ambient temperature, airflow, module power dissipation, and the need for increased reliability. A reduction in the operating temperature of the module will result in an increase in reliability. The thermal data presented here is based on physical measurements taken in a wind tunnel. The test set-up is shown in Figure 34. The preferred airflow direction for cooling the module and the thermal reference points, T_{ref} used in the specifications are shown in Figure 35. For reliable operation the temperatures at these points should not exceed 120°C (IC300) and 115°C (C202). The output power of the module should not exceed the rated power of the module ($V_{o,set} \times I_{o,max}$). Please refer to the Application Note “Thermal Characterization Process for Open-Frame Board-Mounted Power Modules” for a detailed discussion of thermal aspects including maximum device temperatures. Increased airflow over the module enhances the heat transfer via convection. The thermal derating of figures 2, 8, 14 and 20 show the maximum output current that can be delivered by each module in the indicated orientation without exceeding the maximum T_{ref} temperature versus local ambient temperature (TA) for several air flow conditions. The thermal derating curves were generated using a 12 layer evaluation board with 3oz copper in inner layers and 2 oz in outer layers.

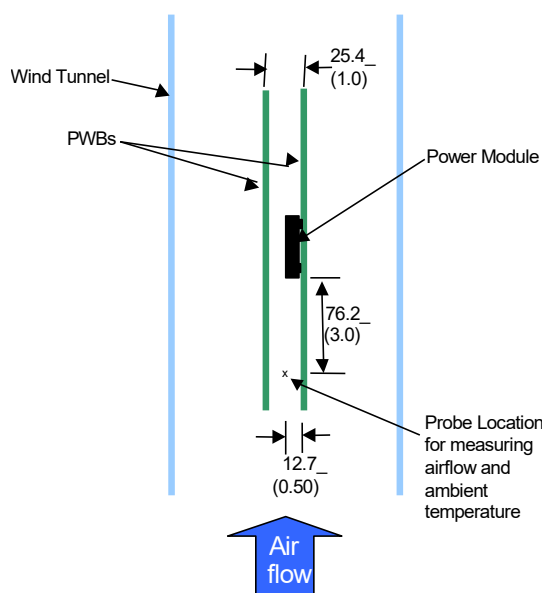


Figure 34. Thermal Test Setup.


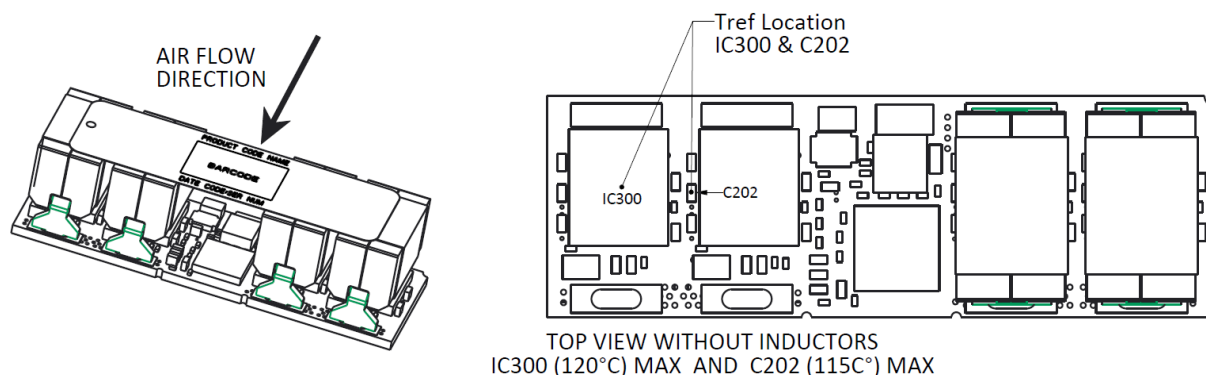


Figure 35. Preferred airflow direction and the location of the thermal reference points

The MLX160 Open Frame modules are supplied in tape & reel as standard. Modules are shipped in quantities of 160 modules per reel. All Dimensions are in millimeters and (in inches).

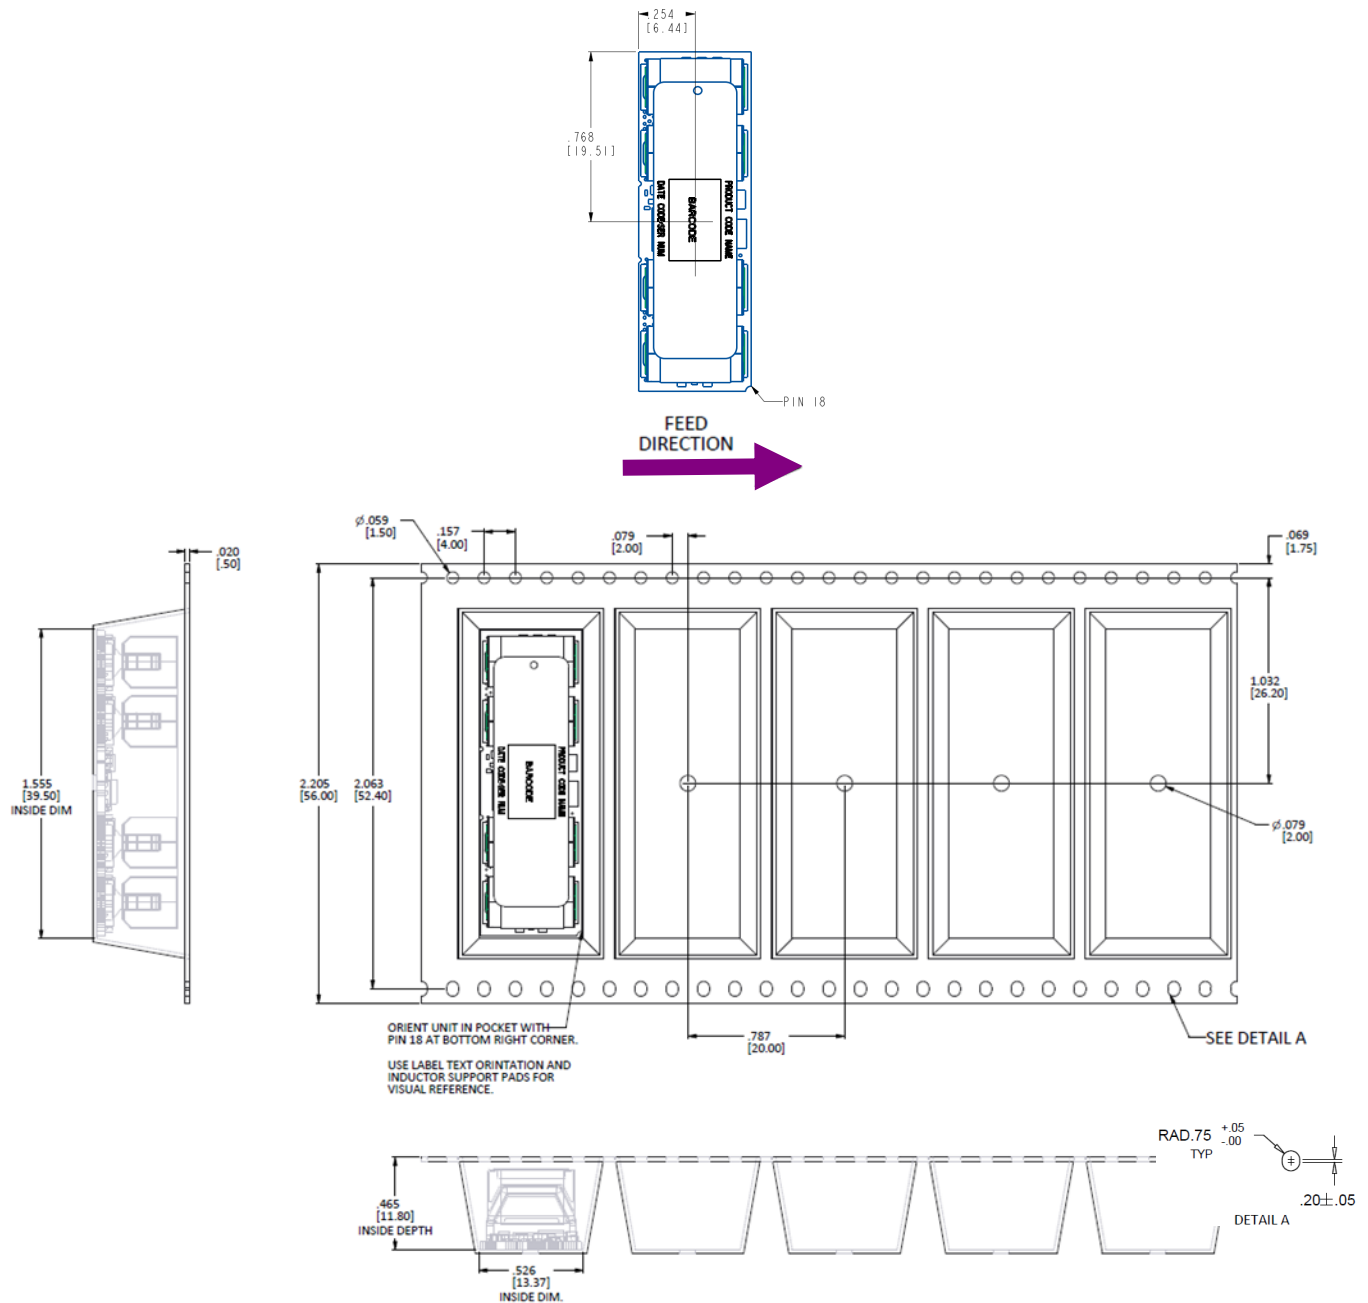

Reel Dimensions:

Outside Dimensions: 330.2mm (13")

Inside Dimensions: 177.8 mm (7")

Tape Width: 56.00mm (2.205")

MLX160A0XY3-SRZ Technical Specifications (continued)


Surface Mount Information

Pick and Place

The MLX160 Open Frame modules use an open frame construction and are designed for a fully automated assembly process. The modules are fitted with a label designed to provide a large surface area for pick and place operations. The label meets all the requirements for surface mount processing, as well as safety standards, and is able to withstand reflow temperatures of up to 300°C. The label also carries product information such as product code, serial number and the location of manufacture.

Nozzle Recommendations

For 5 mil thick stencil, the opening is recommended to be 25 mil square for small rectangular pads and 41 mils x 95 mils for large rectangular pads. The module weight has been kept to a minimum by using open frame construction. Variables such as nozzle size, tip style, vacuum pressure and placement speed should be considered to optimize this process. Due to the gap between the MLX160 inductors, a dual nozzle is recommended. Suggested dimensions for a dual nozzle are shown in figure below. The minimum recommended inside nozzle diameter for reliable operation is 6mm. A rubber suction cup type nozzle is recommended. The maximum nozzle outer diameter, which will safely fit within the allowable component spacing, is 10 mm.

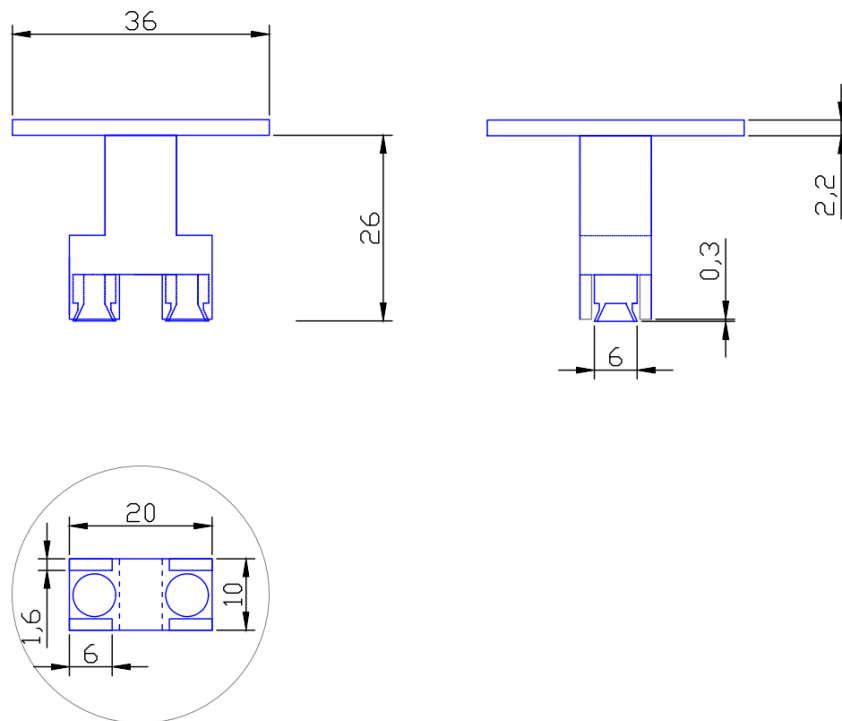

Bottom Side / First Side Assembly

This module is not recommended for assembly on the bottom side of a customer board. If such an assembly is attempted, components may fall off the module during the second reflow process.

Lead Free Soldering

The modules are lead-free (Pb-free) and RoHS compliant and fully compatible in a Pb-free soldering process. Failure to observe the instructions below may result in the failure of or cause damage to the modules and can adversely affect long-term reliability.

MLX160A0XY3-SRZ Technical Specifications (continued)

Surface Mount Information (continued)

Pb-free Reflow Profile

Power Systems will comply with J-STD-020 Rev. D (Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices) for both Pb-free solder profiles and MSL classification procedures. This standard provides a recommended forced-air-convection reflow profile based on the volume and thickness of the package (table 4-2). The suggested Pb-free solder paste is Sn/Ag/Cu (SAC). The recommended linear reflow profile using Sn/Ag/Cu solder is shown in figure below. Soldering outside of the recommended profile requires testing to verify results and performance.

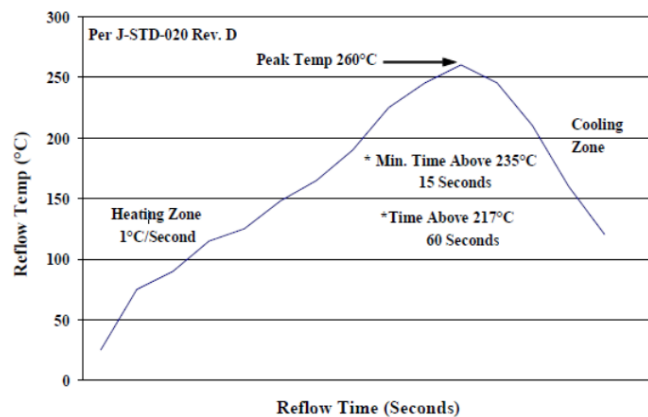


Figure 36. Recommended linear reflow profile using Sn/Ag/Cu solder

MSL Rating

The MLX160A0XY3-SRZ Open Frame modules have a MSL rating of 2A.

Storage and Handling

The recommended storage environment and handling procedures for moisture-sensitive surface mount packages is detailed in J-STD-033 Rev. A (Handling, Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices). Moisture barrier bags (MBB) with desiccant are required for MSL ratings of 2 or greater. These sealed packages should not be broken until time of use. Once the original package is broken, the floor life of the product at conditions of 30°C and 60% relative humidity varies according to the MSL rating (see J-STD-033A). The shelf life for dry packed SMT packages will be a minimum of 12 months from the bag seal date, when stored at the following conditions: < 40°C, < 90% relative humidity.

Post Solder Cleaning and Drying Considerations

Post solder cleaning is usually the final circuit-board assembly process prior to electrical board testing. The result of inadequate cleaning and drying can affect both the reliability of a power module and the testability of the finished circuit-board assembly. For guidance on appropriate soldering, cleaning and drying procedures, refer to Board Mounted Power Modules: Soldering and Cleaning Application Note (AN04-001).

MLX160A0XY3-SRZ Technical Specifications (continued)

Family Options

Approved Combinations:

Output Current	Output Configuration in Master + Satellite Combination	Master Series	Satellite Series
40	Single Output	MLX040	None
40 + 40*	Dual Output	MLX040	SLX040
40 + 2 x 40*	Dual Output	MLX040	2 X SLX040
40 + 3 x 40*	Dual Output	MLX040	3 X SLX040
40 + 160*	Dual Output	MLX040	SLX160
80	Single Output	MLX080	None
80 + 40*	Dual Output	MLX080	SLX040
80 + 2 x 40*	Dual Output	MLX080	2 x SLX040
80 + 3 x 40*	Dual Output	MLX080	3 x SLX040
80 + 160*	Dual Output	MLX080	SLX160
120	Single Output	MLX120	None
120 + 40*	Dual Output	MLX120	SLX040
120 + 2 x 40*	Dual Output	MLX120	2 x SLX040
120 + 3 x 40*	Dual Output	MLX120	3 x SLX040
120 + 160*	Dual Output	MLX120	SLX160
160	Single Output	MLX160	None
200*	Single Output	MLX160	SLX040
240*	Single Output	MLX160	2 x SLX040
280*	Single Output	MLX160	3 x SLX040
320	Single Output	MLX160	SLX160
160 + 40	Dual Output	MLX160	SLX040
160 + 2 x 40*	Dual Output	MLX160	2 x SLX040
160 + 3 x 40*	Dual Output	MLX160	3 x SLX040
160 + 160*	Dual Output	MLX160	SLX160

* Verified by design. Test data not available for these individual combinations

MLX160A0XY3-SRZ Ordering Information

Please contact OmniOn Power™ Sales Representative for pricing, availability, and optional features.

Table 4. Device Codes

Device Code	Type	Input Voltage Range	Output Voltage	Output Current	On/Off Logic	Ordering code
MLX160A0XY3-SRZ	Master	7 – 14V _{DC}	0.45 – 2 V _{DC}	160A	Programmable	1600374230A

Table 5. Coding Scheme

Module type Identifier	Family	Sequencing Option	Output current	Output voltage	On/Off logic	Remote Sense	Options	ROHS Compliance
M	L	X	160A	X	Y	3	-SR	Z
M=master S=satellite	L = DLynx III	X=without sequencing	160A	X = programmable output	Y = programmable enable logic	3 = Remote Sense	S = Surface Mount R = Tape & Reel	Z = ROHS Compliant

Table 6 Orderable Accessories

Manufacturer Part Number	Ordering Code	Description
EVAL MLX160	1600374234A	Evaluation Board with MLX160A module
EVAL MLX160 SLX040 DUAL OUTPUT	1600374232A	Evaluation Board with MLX160A module AND 40A SLX module
EVAL MLX160 SLX160 SINGLE OUPUT	1600374233A	Evaluation Board with MLX160A module AND 160A SLX module
I ² C_USB_DONGLE_2.X	1600218857A	USB dongle needed to use Digital Power Insights software. Cables or evaluation board are not included.
I ² C_USB_DONGLE_2.X_WITH_CABLES	150036482	USB dongle and cables (PC to dongle and dongle to eval board) to use Digital Power Insights software. Evaluation board is not included.
I ² C_USB_DONGLE_2.X_WITH_CABLES_AND_POL_EVAL_BOARD	CC109164430	Digital Power Insights (DPI) kit with USB dongle, needed cables, a digital POL evaluation board (PDT012 or PJT020) and quick guide.

OmniOn Power™ digital non-isolated DC-DC products may be covered by one or more of the following patents licensed from Bel Power Solutions, Inc.: US20040246754, US2004090219A1, US2004093533A1, US2004123164A1, US2004123167A1, US2004178780A1, US2004179382A1, US20050200344, US20050223252, US2005289373A1, US20060061214, US2006015616A1, US20060174145, US20070226526, US20070234095, US20070240000, US20080052551, US20080072080, US20080186006, US6741099, US6788036, US6936999, US6949916, US7000125, US7049798, US7068021, US7080265, US7249267, US7266709, US7315156, US7372682, US7373527, US7394445, US7456617, US7459892, US7493504, US7526660.

Outside the US Bel Power Solutions, Inc. licensed technology is protected by patents: AU3287379AA, AU3287437AA, AU3290643AA, AU3291357AA, CN10371856C, CN10452610C, CN10458656C, CN10459360C, CN10465848C, CN11069332A, CN11124619A, CN11346682A, CN1685299A, CN1685459A, CN1685582A, CN1685583A, CN1698023A, CN1802619A, EP1561156A1, EP1561268A2, EP1576710A1, EP1576711A1, EP1604254A4, EP1604264A4, EP1714369A2, EP1745536A4, EP1769382A4, EP1899789A2, EP1984801A2, W004044718A1, W004045042A3, W004045042C1, W004062061 A1, W004062062A1, W004070780A3, W004084390A3, W004084391A3, W005079227A3, W005081771A3, W006019569A3, W02007001584A3, W02007094935A3

Contact Us

For more information, call us at

USA/Canada:

+1 888 546 3243, or +1 972 244 9288

Asia-Pacific:

+86-21-53899666

Europe, Middle-East and Africa:

+49.89.878067-280

Change History (excludes grammar & clarifications)

Revision	Date	Description of the change
1.10	09/26/2023	Updated Family output description
1.11	11/03/2023	Updated as per OmniOn Power™ template
1.12	01/19/2024	Updated Class to 2 on Page 1
1.13	02/24/2024	Update Pin Assignment Page 29, application circuit Page 33 and Nozzle Description Page 36
1.14	08/23/2024	Update description of TSEN1 and Tsen_Sat_L2 pins
1.15	10/09/2024	Update Manufacturer parts on Page 39.
1.16	11/05/2024	Replace image on Pg 1 with updated image.
1.17	11/21/2024	Updated SMT nozzle and pick and place instructions
1.18	01/29/2025	Pin 59 description updated on Page 30
1.19	02/03/2025	Updated SMT pickup nozzle recommendations
1.20	05/13/2025	Replaced VRRDY1 & VRRDY2 with PGOOD1 & PGOOD2

OmniOn Power Inc.

601 Shiloh Rd.
Plano, TX USA

omnionpower.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. OmniOn Power™ does not accept any responsibility for errors or lack of information in this document and makes no warranty with respect to and assumes no liability as a result of any use of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of OmniOn Power™. This document does not convey license to any patent or any intellectual property right. Copyright© 2024 OmniOn Power Inc. All rights reserved.